



Air Conditioners

# Technical Data

Pair application



EEDEN11-100

RXS-J



Air Conditioners

# Technical Data

Pair application



EEDEN11-100

RXS-J

# TABLE OF CONTENTS

## RXS-J

|    |  |    |
|----|--|----|
| 1  | Features .....                           | 2  |
| 2  | Specifications .....                     | 3  |
|    | Nominal Capacity And Nominal Input ..... | 3  |
|    | Technical Specifications .....           | 3  |
|    | Electrical Specifications .....          | 4  |
| 3  | Electrical data.....                     | 5  |
|    | Electrical Data .....                    | 5  |
| 4  | Capacity tables .....                    | 9  |
|    | Cooling/Heating Capacity Tables .....    | 9  |
| 5  | Dimensional drawings .....               | 27 |
|    | Dimensional Drawings .....               | 27 |
| 6  | Centre of gravity .....                  | 28 |
|    | Centre of Gravity .....                  | 28 |
| 7  | Piping diagrams .....                    | 30 |
|    | Piping Diagrams .....                    | 30 |
| 8  | Wiring diagrams .....                    | 32 |
|    | Wiring Diagrams - Single Phase .....     | 32 |
| 9  | Sound data.....                          | 34 |
|    | Sound Pressure Spectrum .....            | 34 |
| 10 | Operation range .....                    | 36 |
|    | Operation Range .....                    | 36 |

# 1 Features

- Energy efficient units: up to class A energy labels
- Outdoor unit silent operation: "silent" button on the remote control lowers the operation sound of the outdoor unit by 3dBA to ensure a quiet environment for the neighbourhood.
- Outdoor units for pair application
- Energy efficient units: full range A class energy labels
- Daikin outdoor units are neat, sturdy and can easily be mounted on a roof or terrace or simply placed against an outside wall
- Energy saving during standby mode: reduces current consumption by about 80% when operating in standby. If no people are detected for more than 20 minutes, the system will automatically switch to the current-saving mode.
- Outdoor unit silent operation: "silent" button on the remote control lowers the operation sound of the outdoor unit by 3dBA to ensure a quiet environment for the neighbourhood.
- Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency



## 2 Specifications

| 2-1 Nominal Capacity And Nominal Input |                 |      |        | FTXS20J2V1B / RXS20J2V1B | FTXS25J2V1B / RXS25J2V1B  | FTXS35J2V1B / RXS35J2V1B  | FTXS42J2V1B / RXS42J2V1B  | FTXS50J2V1B / RXS50J2V1B  |
|--|-----------------|------|--------|--------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Cooling capacity                       | Min.            |      | kW     | 1.3                      | 1.3                       | 1.4                       | 1.7                       | 1.7                       |
|  |                 |      | Btu/h  | 4,400                    | 4,400                     | 4,800                     | 5,800                     | 5,800                     |
|  |                 |      | kcal/h | 1,120                    | 1,120                     | 1,200                     | 1,460                     | 1,460                     |
|  | Nom.            |      | kW     | 2.0 (3)                  | 2.5 (3)                   | 3.5 (3)                   | 4.2 (3)                   | 5.0 (3)                   |
|  |                 |      | Btu/h  | 6,800 (3)                | 8,500 (3)                 | 11,900 (3)                | 14,300 (3)                | 17,100 (3)                |
|  |                 |      | kcal/h | 1,720 (3)                | 2,150 (3)                 | 3,010 (3)                 | 3,010 (3)                 | 4,300 (3)                 |
|  | Max.            |      | kW     | 2.8                      | 3.2                       | 4.0                       | 5.0                       | 5.3                       |
|  |                 |      | Btu/h  | 9,600                    | 10,900                    | 13,600                    | 17,100                    | 18,100                    |
|  |                 |      | kcal/h | 2,410                    | 2,750                     | 3,440                     | 4,300                     | 4,560                     |
| Heating capacity                       | Min.            |      | kW     | 1.3                      | 1.3                       | 1.4                       | 1.7                       | 1.7                       |
|  |                 |      | Btu/h  | 4,400                    | 4,400                     | 4,800                     | 5,800                     | 5,800                     |
|  |                 |      | kcal/h | 1,120                    | -                         | 1,200                     | 1,460                     | 1,460                     |
|  | Nom.            |      | kW     | 2.7 (4)                  | 3.3                       | 4.0 (4)                   | 5.4 (4)                   | 5.8 (4)                   |
|  |                 |      | Btu/h  | 9,200 (4)                | 11,600 (4)                | 13,600 (4)                | 18,400 (4)                | 19,800 (4)                |
|  |                 |      | kcal/h | 2,320 (4)                | -                         | 3,440 (4)                 | 3,440 (4)                 | 4,990 (4)                 |
|  | Max.            |      | kW     | 4.3                      | 4.7                       | 5.2                       | 6.0                       | 6.5                       |
|  |                 |      | Btu/h  | 14,700                   | 16,000                    | 17,700                    | 20,500                    | 22,200                    |
|  |                 |      | kcal/h | 3,700                    | -                         | 4,470                     | 5,160                     | 5,590                     |
| Power input                            | Cooling         | Min. | kW     | 0.32                     | 0.320                     | 0.350                     | 0.440                     | 0.440                     |
|  |                 | Nom. | kW     | 0.450                    | 0.535                     | 0.860                     | 1.210                     | 1.460                     |
|  |                 | Max. | kW     | 0.810                    | 0.810                     | 1.190                     | 2.330                     | 1.810                     |
|  | Heating         | Min. | kW     | 0.310                    | -                         | 0.340                     | 0.400                     | 0.400                     |
|  |                 | Nom. | kW     | 0.610                    | 0.71                      | 0.950                     | 1.450                     | 1.530                     |
|  |                 | Max. | kW     | 1.290                    | -                         | 1.460                     | 1.980                     | 2.000                     |
| EER                                    |                 |      |        | 4.44                     | 4.63                      | 4.07                      | 3.47                      | 3.42                      |
| COP                                    |                 |      |        | 4.43                     | 4.65                      | 4.21                      | 3.72                      | 3.79                      |
| Annual energy consumption              |                 |      | kWh    | 225                      | 270                       | 430                       | 605                       | 730                       |
| Energy label                           | Cooling         |      |        | A                        | A                         | A                         | A                         | A                         |
|  | Heating         |      |        | A                        | A                         | A                         | A                         | A                         |
| Piping connections                     | Liquid          | OD   | mm     | 6.35                     | 6.35                      | 6.35                      | 6.35                      | 6.35                      |
|  | Gas             | OD   | mm     | 9.52                     | 9.52                      | 9.52                      | 9.52                      | 12.7                      |
|  | Drain           | OD   | mm     | 18.0                     | 18.0                      | 18.0                      | 18.0                      | 18.0                      |
|  | Heat insulation |      |        |                          | Both liquid and gas pipes | Both liquid and gas pipes | Both liquid and gas pipes | Both liquid and gas pipes |

### Notes

- (1) Energy label: scale from A (most efficient) to G (less efficient)
- (2) Annual energy consumption: based on average use of 500 running hours per year at full load (nominal conditions)
- (3) Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m
- (4) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m

| 2-2 Technical Specifications |             |        |    | RXS25J2V1B  | RXS42J2V1B  | RXS20J2V1B  | RXS35J2V1B  | RXS50J2V1B  |
|------------------------------|-------------|--------|----|-------------|-------------|-------------|-------------|-------------|
| Casing                       | Colour      |        |    | Ivory white | Ivory white | Ivory white | Ivory white | Ivory white |
| Dimensions                   | Unit        | Height | mm | 550         | 550         | 550         | 550         | 735         |
|                              |             | Width  | mm | 765         | 765         | 765         | 765         | 825         |
|                              |             | Depth  | mm | 285         | 285         | 285         | 285         | 300         |
|                              | Packed unit | Height | mm | 612         | 612         | 612         | 612         | 797         |
|                              |             | Width  | mm | 906         | 906         | 906         | 906         | 960         |
|                              |             | Depth  | mm | 364         | 364         | 364         | 364         | 390         |
| Weight                       | Unit        |        | kg | 34          | 39          | 32          | 34          | 48          |
|                              | Packed unit |        | kg | 38          | 45          | 35          | 38          | 53          |

## 2 Specifications

| 2-2 Technical Specifications |                  |                  |         |                               | RXS25J2V1B                           | RXS42J2V1B                           | RXS20J2V1B                           | RXS35J2V1B                           | RXS50J2V1B                           |
|------------------------------|------------------|------------------|---------|-------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| Heat exchanger               | Length           |                  | mm      |                               | 805                                  | 810                                  | 828                                  | 805                                  | 845                                  |
|                              | Rows             | Quantity         |         |                               | 2                                    | 2                                    | 1                                    | 2                                    | 2                                    |
|                              | Fin pitch        |                  | mm      |                               | 1.4                                  | 1.5                                  | 1.4                                  | 1.4                                  | 1.8                                  |
|                              | Stages           | Quantity         |         |                               | 24                                   | 24                                   | 24                                   | 24                                   | 32                                   |
|                              | Tube type        |                  |         |                               | ø7 Hi-XA                             | ø8 Hi-XA                             | ø7 Hi-XA                             | ø7 Hi-XA                             | ø8 Hi-XA                             |
|                              | Fin              | Type             |         |                               | Waffle louvered fin                  | Waffle louvered fin                  | Waffle louvered fin                  | Waffle louvered fin                  | Waffle louvered fin                  |
| Treatment                    |                  |                  |         | Anti-corrosion treatment (PE) | Anti-corrosion treatment (PE)        | Anti-corrosion treatment (PE)        | Anti-corrosion treatment (PE)        | Anti-corrosion treatment (PE)        |                                      |
| Fan                          | Type             |                  |         |                               | Propeller fan                        | Propeller fan                        | Propeller fan                        | Propeller fan                        | Propeller fan                        |
|                              | Air flow rate    | Cooling          | High    | m <sup>3</sup> /min           | 33.5                                 | 37.3                                 | 36.2                                 | 36.0                                 | 50.9                                 |
|                              |                  |                  |         | cfm                           | 1,183                                | 1,317                                | 1,278                                | 1,271                                | 1,797                                |
|                              |                  | Super Low        |         | m <sup>3</sup> /min           | 32.7                                 | 30.1                                 | 30.1                                 | 30.6                                 | 48.9                                 |
|                              |                  |                  |         | cfm                           | 1,155                                | 1,063                                | 1,063                                | 1,080                                | 1,727                                |
|                              | Heating          | High             |         | m <sup>3</sup> /min           | 28.3                                 | 31.3                                 | 30.6                                 | 28.3                                 | 45.0                                 |
|                              |                  |                  |         | cfm                           | 999                                  | 1,105                                | 1,080                                | 999                                  | 1,589                                |
|                              |                  | Super Low        |         | m <sup>3</sup> /min           | 28.5                                 | 25.6                                 | 25.6                                 | 27.2                                 | 43.1                                 |
| cfm                          |                  |                  |         | 1,006                         | 904                                  | 904                                  | 960                                  | 1,522                                |                                      |
| Fan motor                    | Model            |                  |         |                               | D23H-28                              | D50R-28                              | D23H-28                              | D23H-28                              | KFD-380-50-8C                        |
|                              | Output           |                  |         | W                             | 23                                   | 50                                   | 23                                   | 23                                   | 53                                   |
|                              | Speed            | Cooling          | High    | rpm                           | 860                                  | 890                                  | 860                                  | 920                                  | 780                                  |
|                              |                  |                  | Heating | High                          | rpm                                  | 860                                  | 890                                  | 860                                  | 860                                  |
| Sound power level            | Cooling          | High             |         | dBA                           | 61                                   | 63                                   | 61                                   | 63                                   | 63                                   |
| Sound pressure level         | Cooling          | High             |         | dBA                           | 46                                   | 48                                   | 46                                   | 48                                   | 48                                   |
|                              |                  | Silent operation |         | dBA                           | 43                                   | 44                                   | 43                                   | 44                                   | 44                                   |
|                              | Heating          | High             |         | dBA                           | 47                                   | 48                                   | 47                                   | 48                                   | 48                                   |
|                              |                  | Silent operation |         | dBA                           | 44                                   | 45                                   | 44                                   | 45                                   | 45                                   |
| Compressor                   | Model            |                  |         |                               | 1YC23AEXD                            | 2YC36BXD                             | 1YC23AEXD                            | 1YC23AEXD                            | 2YC36BXD                             |
|                              | Type             |                  |         |                               | Hermetically sealed swing compressor | Hermetically sealed swing compressor | Hermetically sealed swing compressor | Hermetically sealed swing compressor | Hermetically sealed swing compressor |
|                              | Output           |                  |         | W                             | 600                                  | 1,100                                | 600                                  | 600                                  | 1,100                                |
| Operation range              | Cooling          | Ambient          | Min.    | °CDB                          | -10 (0.000)                          | -10 (0.000)                          | -10 (0.000)                          | -10 (0.000)                          | -10 (0.000)                          |
|                              |                  |                  | Max.    | °CDB                          | 46 (0.000)                           | 46 (0.000)                           | 46 (0.000)                           | 46 (0.000)                           | 46 (0.000)                           |
|                              | Heating          | Ambient          | Min.    | °CWB                          | -15                                  | -15                                  | -15                                  | -15                                  | -15                                  |
|                              |                  |                  | Max.    | °CWB                          | 18                                   | 18                                   | 18                                   | 18                                   | 18                                   |
| Refrigerant                  | Type             |                  |         |                               | R-410A                               | R-410A                               | R-410A                               | R-410A                               | R-410A                               |
|                              | Charge           |                  |         | kg                            | 1.0                                  | 1.3                                  | 0.8                                  | 1.2                                  | 1.7                                  |
| Refrigerant oil              | Type             |                  |         |                               | FVC50K                               | FVC50K                               | FVC50K                               | FVC50K                               | FVC50K                               |
|                              | Charged volume   |                  |         | l                             | 0.375                                | 0.65                                 | 0.375                                | 0.375                                | 0.65                                 |
| Piping connections           | Liquid           | OD               | mm      |                               | 6.35                                 | 6.35                                 | 6.35                                 | 6.35                                 | 6.35                                 |
|                              | Gas              | OD               | mm      |                               | 9.52                                 | 9.52                                 | 9.52                                 | 9.52                                 | 12.7                                 |
|                              | Drain            | Type             |         |                               | Hole                                 | Hole                                 | Hole                                 | Hole                                 | Hole                                 |
|                              | Level difference | IU - OU          | Max.    | m                             | 15                                   | 15                                   | 15                                   | 15                                   | 20                                   |
|                              | Heat insulation  |                  |         |                               | Both liquid and gas pipes            | Both liquid and gas pipes            | Both liquid and gas pipes            | Both liquid and gas pipes            | Both liquid and gas pipes            |

| 2-3 Electrical Specifications |                               |          |    |                         | RXS25J2V1B              | RXS42J2V1B              | RXS20J2V1B              | RXS35J2V1B              | RXS50J2V1B          |
|-------------------------------|-------------------------------|----------|----|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|---------------------|
| Power supply                  | Phase                         |          |    |                         | 1~                      | 1~                      | 1~                      | 1~                      | 1~                  |
|                               | Frequency                     |          | Hz |                         | 50                      | 50                      | 50                      | 50                      | 50                  |
|                               | Voltage                       |          | V  |                         | 220-240                 | 220-240                 | 220-240                 | 220-240                 | 220-240             |
| Current                       | Nominal running current (RLA) | Cooling  | A  | 3.0 (1) 2.8 (2) 2.7 (3) | 6.0 (1) 5.7 (2) 5.5 (3) | 2.5 (1) 2.4 (2) 2.3 (3) | 4.3 (1) 4.1 (2) 3.9 (3) | 6.7 (1) 6.4 (2) 6.1 (3) |                     |
|                               |                               | Heating  | A  | 3.9 (1) 3.8 (2) 3.6 (3) | 7.1 (1) 6.8 (2) 6.5 (3) | 3.4 (1) 3.3 (2) 3.1 (3) | 4.7 (1) 4.5 (2) 4.3 (3) | 7.0 (1) 6.7 (2) 6.4 (3) |                     |
|                               | Starting current              | Cooling  | A  | 4.0                     | 7.2                     | 3.5                     | 4.8                     | 7.1                     |                     |
|                               |                               | Heating  | A  | 4.0                     | 7.2                     | 3.5                     | 4.8                     | 7.1                     |                     |
| Wiring connections            | For power supply              | Quantity |    |                         | 3                       | 3                       | 3                       | 3                       | 3                   |
|                               | For connection with indoor    | Quantity |    |                         | 4                       | 4                       | 4                       | 4                       | 4                   |
|                               |                               | Remark   |    |                         | Earth wire included     | Earth wire included     | Earth wire included     | Earth wire included     | Earth wire included |

### Notes

(1) 220V, (2) 230V, (3) 240V

### 3 Electrical data

#### 3 - 1 Electrical Data

##### RXS20J2V1B

| Representative Unit Combination |              | Power Supply |                                  |      |     | Comp |     | OFM |      | IFM |      |
|---------------------------------|--------------|--------------|----------------------------------|------|-----|------|-----|-----|------|-----|------|
| Indoor Unit                     | Outdoor Unit | Hz - Volts   | Voltage Range                    | MCA  | MFA | RHz  | RLA | W   | FLA  | W   | FLA  |
| FTXS20J2V1B                     | RXS20J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V | 9.75 | 10  | 34   | 2.1 | 23  | 0.23 | 23  | 0.15 |
|                                 |              | 50 - 230     |                                  |      |     |      | 2.0 |     |      |     |      |
|                                 |              | 50 - 240     |                                  |      |     |      | 1.9 |     |      |     |      |

##### NOTES

1. RLA is based on the following conditions,  
Indoor temp. 27°C DB/19.0 °C WB.  
Outdoor temp. 35°C DB.
2. Maximum allowable voltage variation between phases is 2%.
3. Select wire size based on the larger value of MCA.
4. Instead of fuse, use circuit breaker.

##### SYMBOLS

- MCA : Min. Circuit Amps (A)
- MFA : Max. Fuse Amps (A)
- RLA : Rated Load Amps (A)
- OFM : Outdoor Fan Motor
- IFM : Indoor Fan Motor
- FLA : Full Load Amps (A)
- W : Fan Motor Rated Output (W)
- RHz : Rated Operating Frequency (Hz)

3D055006D

##### RXS25J2V1B

| Representative Unit Combination |              | Power Supply |                                   |      |     | Comp |     | OFM     |      | IFM |      |
|---------------------------------|--------------|--------------|-----------------------------------|------|-----|------|-----|---------|------|-----|------|
| Indoor Unit                     | Outdoor Unit | Hz - Volts   | Voltage Range                     | MCA  | MFA | RHz  | RLA | W       | FLA  | W   | FLA  |
| FTXS25J2V1B                     | RXS25J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V  | 9.75 | 10  | 45   | 2.6 | 23      | 0.23 | 23  | 0.15 |
|                                 |              | 50 - 230     |                                   |      |     |      | 2.4 |         |      |     |      |
|                                 |              | 50 - 240     |                                   |      |     |      | 2.3 |         |      |     |      |
| FVXS25FV1B                      | RXS25J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V  | 9.75 | 10  | 46   | 3.0 | 23 0.23 |      | 48  | 0.05 |
|                                 |              | 50 - 230     |                                   |      |     |      | 2.8 |         |      |     |      |
|                                 |              | 50 - 240     |                                   |      |     |      | 2.7 |         |      |     |      |
| FFQ25B8V1B                      | RXS25J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50 Hz 198V | 9.75 | 10  | 46   | 2.4 | 23      | 0.23 | 55  | 0.60 |
|                                 |              | 50 - 230     |                                   |      |     |      | 2.3 |         |      |     |      |
|                                 |              | 50 - 240     |                                   |      |     |      | 2.1 |         |      |     |      |
| FLXS25BAVMB                     | RXS25J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50 Hz 198V | 9.75 | 10  | 46   | 2.7 | 23      | 0.23 | 34  | 0.34 |
|                                 |              | 50 - 230     |                                   |      |     |      | 2.5 |         |      |     |      |
|                                 |              | 50 - 240     |                                   |      |     |      | 2.4 |         |      |     |      |
| FDXS25E7VMB                     | RXS25J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50 Hz 198V | 9.75 | 10  | 46   | 2.5 | 23      | 0.23 | 62  | 0.50 |
|                                 |              | 50 - 230     |                                   |      |     |      | 2.4 |         |      |     |      |
|                                 |              | 50 - 240     |                                   |      |     |      | 2.2 |         |      |     |      |

##### NOTES

1. RLA is based on the following conditions,  
Indoor temp. 27°C DB/19.0 °C WB.  
Outdoor temp. 35°C DB.
2. Maximum allowable voltage variation between phases is 2%.
3. Select wire size based on the larger value of MCA.
4. Instead of fuse, use circuit breaker.

##### SYMBOLS

- MCA : Min. Circuit Amps (A)
- MFA : Max. Fuse Amps (A)
- RLA : Rated Load Amps (A)
- OFM : Outdoor Fan Motor
- IFM : Indoor Fan Motor
- FLA : Full Load Amps (A)
- W : Fan Motor Rated Output (W)
- RHz : Rated Operating Frequency (Hz)

3D070944

### 3 Electrical data

#### 3 - 1 Electrical Data

##### RXS35J2V1B

| Representative Unit Combination |              | Power Supply |                                   |      |     | Comp |     | OFM |      | IFM |      |     |
|---------------------------------|--------------|--------------|-----------------------------------|------|-----|------|-----|-----|------|-----|------|-----|
| Indoor Unit                     | Outdoor Unit | Hz - Volts   | Voltage Range                     | MCA  | MFA | RHz  | RLA | W   | FLA  | W   | FLA  |     |
| FTXS352JV1B                     | RXS35J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V  | 9.75 | 10  | 65   | 3.9 | 23  | 0.23 | 23  | 0.15 |     |
|                                 |              | 50 - 230     |                                   |      |     |      |     |     |      |     |      | 3.7 |
|                                 |              | 50 - 240     |                                   |      |     |      |     |     |      |     |      | 3.5 |
| FVXS35FV1B                      | RXS35J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V  | 9.75 | 10  | 66   | 4.8 | 23  | 0.23 | 48  | 0.05 |     |
|                                 |              | 50 - 230     |                                   |      |     |      |     |     |      |     |      | 4.6 |
|                                 |              | 50 - 240     |                                   |      |     |      |     |     |      |     |      | 4.4 |
| FFQ35B8V1B                      | RXS35J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V  | 9.75 | 10  | 66   | 4.3 | 23  | 0.23 | 55  | 0.05 |     |
|                                 |              | 50 - 230     |                                   |      |     |      |     |     |      |     |      | 4.1 |
|                                 |              | 50 - 240     |                                   |      |     |      |     |     |      |     |      | 3.9 |
| FHQ35BVV1B                      | RXS35J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50 Hz 198V | 9.75 | 10  | 66   | 4.1 | 23  | 0.23 | 62  | 0.60 |     |
|                                 |              | 50 - 230     |                                   |      |     |      |     |     |      |     |      | 3.9 |
|                                 |              | 50 - 240     |                                   |      |     |      |     |     |      |     |      | 3.9 |
| FBQ35C7VEB                      | RXS35J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50 Hz 198V | 9.75 | 10  | 66   | 4.4 | 23  | 0.23 | 65  | 0.60 |     |
|                                 |              | 50 - 230     |                                   |      |     |      |     |     |      |     |      | 4.2 |
|                                 |              | 50 - 240     |                                   |      |     |      |     |     |      |     |      | 4.0 |
| FLXS35BAVMB                     | RXS35J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50 Hz 198V | 9.75 | 10  | 66   | 4.5 | 23  | 0.23 | 34  | 0.34 |     |
|                                 |              | 50 - 230     |                                   |      |     |      |     |     |      |     |      | 4.3 |
|                                 |              | 50 - 240     |                                   |      |     |      |     |     |      |     |      | 4.1 |
| FDXS35E7VMB                     | RXS35J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50 Hz 198V | 9.75 | 10  | 66   | 4.4 | 23  | 0.23 | 62  | 0.50 |     |
|                                 |              | 50 - 230     |                                   |      |     |      |     |     |      |     |      | 4.2 |
|                                 |              | 50 - 240     |                                   |      |     |      |     |     |      |     |      | 4.0 |

**NOTES**

1. RLA is based on the following conditions, Indoor temperature, 27°C DB/19.0 °C WB. Outdoor temperature, 35°C DB.
2. Maximum allowable voltage variation between phases is 2%.
3. Select wire size based on the larger value of MCA.
4. Instead of fuse, use circuit breaker.

**SYMBOLS**

- MCA : Min. Circuit Amps. (A)
- MFA : Max. Fuse Amps. (A)
- RLA : Rated Load Amps. (A)
- OFM : Outdoor Fan Motor
- IFM : Indoor Fan Motor
- FLA : Full Load Amps. (A)
- W : Fan Motor Rated Output (W)
- RHz : Rated Operating Frequency (Hz)

3D070943

##### RXS42J2V1B

| Representative Unit Combination |              | Power Supply |                                  |       |     | Comp |     | OFM |      | IFM |      |     |
|---------------------------------|--------------|--------------|----------------------------------|-------|-----|------|-----|-----|------|-----|------|-----|
| Indoor Unit                     | Outdoor Unit | Hz - Volts   | Voltage Range                    | MCA   | MFA | RHz  | RLA | W   | FLA  | W   | FLA  |     |
| FTXS42J2V1B                     | RXS42J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V | 14.75 | 20  | 57   | 5.6 | 50  | 0.23 | 23  | 0.15 |     |
|                                 |              | 50 - 230     |                                  |       |     |      |     |     |      |     |      | 5.3 |
|                                 |              | 50 - 240     |                                  |       |     |      |     |     |      |     |      | 5.1 |

**NOTES**

1. RLA is based on the following conditions, Indoor temp. 27°C DB/19.0 °C WB. Outdoor temp. 35°C DB.
2. Maximum allowable voltage variation between phases is 2%.
3. Select wire size based on the larger value of MCA.
4. Instead of fuse, use circuit breaker.

**SYMBOLS**

- MCA : Min. Circuit Amps (A)
- MFA : Max. Fuse Amps (A)
- RLA : Rated Load Amps (A)
- OFM : Outdoor Fan Motor
- IFM : Indoor Fan Motor
- FLA : Full Load Amps (A)
- W : Fan Motor Rated Output (W)
- RHz : Rated Operating Frequency (Hz)

3D059709B



### 3 Electrical data

#### 3 - 1 Electrical Data

##### RXS50J2V1B

| Representative Unit Combination |              | Power Supply |                                  |       |     | Comp |     | OFM |      | IFM |      |
|---------------------------------|--------------|--------------|----------------------------------|-------|-----|------|-----|-----|------|-----|------|
| Indoor Unit                     | Outdoor Unit | Hz - Volts   | Voltage Range                    | MCA   | MFA | RHz  | RLA | W   | FLA  | W   | FLA  |
| FTXS50J2V1B                     | RXS50J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V | 19.75 | 20  | 66   | 6.3 | 53  | 0.27 | 23  | 0.15 |
|                                 |              | 50 - 230     |                                  |       |     |      | 6.0 |     |      |     |      |
|                                 |              | 50 - 240     |                                  |       |     |      | 5.7 |     |      |     |      |
| FVXS50FV1B                      | RXS50J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V | 19.75 | 20  | 69   | 6.7 | 53  | 0.27 | 48  | 0.10 |
|                                 |              | 50 - 230     |                                  |       |     |      | 6.3 |     |      |     |      |
|                                 |              | 50 - 240     |                                  |       |     |      | 6.1 |     |      |     |      |

##### NOTES

1. RLA is based on the following conditions,  
Indoor temp. 27°C DB/19.0 °C WB.  
Outdoor temp. 35°C DB.
2. Maximum allowable voltage variation between phases is 2%.
3. Select wire size based on the larger value of MCA.
4. Instead of fuse, use circuit breaker.

##### SYMBOLS

- MCA : Min. Circuit Amps (A)  
MFA : Max. Fuse Amps (A)  
RLA : Rated Load Amps (A)  
OFM : Outdoor Fan Motor  
IFM : Indoor Fan Motor  
FLA : Full Load Amps (A)  
W : Fan Motor Rated Output (W)  
RHz : Rated Operating Frequency (Hz)

3D070939

##### RXS50J2V1B

| Representative Unit Combination |              | Power Supply |                                  |       |     | Comp |     | OFM |      | IFM |      |
|---------------------------------|--------------|--------------|----------------------------------|-------|-----|------|-----|-----|------|-----|------|
| Indoor Unit                     | Outdoor Unit | Hz - Volts   | Voltage Range                    | MCA   | MFA | RHz  | RLA | W   | FLA  | W   | FLA  |
| FLXS50BAVMB                     | RXS50J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V | 19.75 | 20  | 73   | 7.1 | 53  | 0.27 | 34  | 0.54 |
|                                 |              | 50 - 230     |                                  |       |     |      |     |     |      |     |      |
|                                 |              | 50 - 240     |                                  |       |     |      |     |     |      |     |      |
| FDXS50C7VMB                     | RXS50J2V1B   | 50 - 220     | Max. 50Hz 264V<br>Min. 50Hz 198V | 19.75 | 20  | 74   | 6.8 | 53  | 0.27 | 130 | 0.70 |
|                                 |              | 50 - 230     |                                  |       |     |      |     |     |      |     |      |
|                                 |              | 50 - 240     |                                  |       |     |      |     |     |      |     |      |

##### NOTES

1. RLA is based on the following conditions,  
Indoor temp. 27°C DB/19.0 °C WB.  
Outdoor temp. 35°C DB.
2. Maximum allowable voltage variation between phases is 2%.
3. Select wire size based on the larger value of MCA.
4. Instead of fuse, use circuit breaker.

##### SYMBOLS

- MCA : Min. Circuit Amps (A)  
MFA : Max. Fuse Amps (A)  
RLA : Rated Load Amps (A)  
OFM : Outdoor Fan Motor  
IFM : Indoor Fan Motor  
FLA : Full Load Amps (A)  
W : Fan Motor Rated Output (W)  
RHz : Rated Operating Frequency (Hz)

3D070940

### 3 Electrical data

#### 3 - 1 Electrical Data

##### RXS50J2V1B

| Representative Unit Combination |              | Power Supply |                                   |       |     | Comp | OFM |      | IFM |      |
|---------------------------------|--------------|--------------|-----------------------------------|-------|-----|------|-----|------|-----|------|
| Indoor Unit                     | Outdoor Unit | Hz - Volts   | Voltage Range                     | MCA   | MFA | RLA  | W   | FLA  | W   | FLA  |
| FHQ50B8V1B                      | RXS50J2V1B   | 50 - 220     | Max. 50 Hz 264V<br>Min. 50Hz 198V | 19.75 | 20  | 7.5  | 53  | 0.27 | 62  | 0.60 |
|                                 |              | 50 - 230     |                                   |       |     |      |     |      |     |      |
|                                 |              | 50 - 240     |                                   |       |     |      |     |      |     |      |
| FFQ50B8V1B                      | RXS50J2V1B   | 50 - 220     | Max. 50 Hz 264V<br>Min. 50Hz 198V | 19.75 | 20  | 7.43 | 53  | 0.27 | 55  | 0.70 |
|                                 |              | 50 - 230     |                                   |       |     |      |     |      |     |      |
|                                 |              | 50 - 240     |                                   |       |     |      |     |      |     |      |

|                   |     |                                       |
|-------------------|-----|---------------------------------------|
| Minimum Ssc value | kVA | Equipment complying with EN61000-3-12 |
|-------------------|-----|---------------------------------------|

#### NOTES

1. RLA is based on the following conditions,  
Indoor temp. 27°C DB/19.0 °C WB.  
Outdoor temp. 35°C DB.
2. Maximum allowable voltage variation between phases is 2%.
3. Select wire size based on the larger value of MCA.
4. Instead of fuse, use circuit breaker.

#### SYMBOLS

- MCA : Min. Circuit Amps (A)
- MFA : Max. Fuse Amps (A)
- RLA : Rated Load Amps (A)
- OFM : Outdoor Fan Motor
- IFM : Indoor Fan Motor
- FLA : Full Load Amps (A)
- W : Fan Motor Rated Output (W)

3D070949

##### RXS50J2V1B

| Representative Unit Combination |              | Power Supply |                                   |       |     | Comp | OFM |      | IFM |      |
|---------------------------------|--------------|--------------|-----------------------------------|-------|-----|------|-----|------|-----|------|
| Indoor Unit                     | Outdoor Unit | Hz - Volts   | Voltage Range                     | MCA   | MFA | RLA  | W   | FLA  | W   | FLA  |
| FCQ50C8VEB                      | RXS50J2V1B   | 50 - 220     | Max. 50 Hz 264V<br>Min. 50Hz 198V | 19.75 | 20  | 6.0  | 53  | 0.27 | 56  | 0.30 |
|                                 |              | 50 - 230     |                                   |       |     | 5.7  |     |      |     |      |
|                                 |              | 50 - 240     |                                   |       |     | 5.4  |     |      |     |      |

|                   |     |                                       |
|-------------------|-----|---------------------------------------|
| Minimum Ssc value | kVA | Equipment complying with EN61000-3-12 |
|-------------------|-----|---------------------------------------|

#### NOTES

1. RLA is based on the following conditions,  
Indoor temp. 27°C DB/19.0 °C WB.  
Outdoor temp. 35°C DB.
2. Maximum allowable voltage variation between phases is 2%.
3. Select wire size based on the larger value of MCA.
4. Instead of fuse, use circuit breaker.

#### SYMBOLS

- MCA : Min. Circuit Amps (A)
- MFA : Max. Fuse Amps (A)
- RLA : Rated Load Amps (A)
- OFM : Outdoor Fan Motor
- IFM : Indoor Fan Motor
- FLA : Full Load Amps (A)
- W : Fan Motor Rated Output (W)

3D070950

## 4 Capacity tables

### 4 - 1 Cooling/Heating Capacity Tables

FTXS20J2V1B + RXS20J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 9.4  |
| BF  | 0.14 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 2.05                        | 1.84 | 0.35 | 1.96 | 1.80 | 0.38 | 1.86 | 1.76 | 0.41 | 1.83 | 1.74 | 0.43 | 1.77 | 1.71 | 0.45 | 1.68 | 1.67 | 0.48 |
| 16.0   | 22  | 2.14                        | 1.81 | 0.35 | 2.05 | 1.77 | 0.38 | 1.95 | 1.73 | 0.41 | 1.92 | 1.72 | 0.43 | 1.86 | 1.69 | 0.45 | 1.77 | 1.66 | 0.48 |
| 18.0   | 25  | 2.23                        | 1.94 | 0.35 | 2.14 | 1.90 | 0.38 | 2.05 | 1.87 | 0.42 | 2.01 | 1.85 | 0.43 | 1.95 | 1.83 | 0.45 | 1.86 | 1.80 | 0.48 |
| 19.0   | 27  | 2.28                        | 2.09 | 0.35 | 2.19 | 2.05 | 0.38 | 2.09 | 2.02 | 0.42 | 2.06 | 2.00 | 0.43 | 2.00 | 1.98 | 0.45 | 1.91 | 1.95 | 0.48 |
| 22.0   | 30  | 2.42                        | 2.03 | 0.35 | 2.32 | 2.00 | 0.39 | 2.23 | 1.97 | 0.42 | 2.19 | 1.96 | 0.43 | 2.14 | 1.94 | 0.45 | 2.05 | 1.91 | 0.49 |
| 24.0   | 32  | 2.51                        | 1.99 | 0.36 | 2.42 | 1.96 | 0.39 | 2.32 | 1.93 | 0.42 | 2.29 | 1.92 | 0.44 | 2.23 | 1.91 | 0.45 | 2.14 | 1.88 | 0.49 |

Heating 50 Hz 220V-240V

|     |     |
|-----|-----|
| AFR | 9.9 |
|-----|-----|

| Indoor |    | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |  |  |
|--------|----|-----------------------------|------|------|------|------|------|------|------|------|------|--|--|
| EDB    |    | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |  |  |
| °C     | °C | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |  |  |
| 15.0   |    | 1.82                        | 0.52 | 2.12 | 0.54 | 2.43 | 0.57 | 2.79 | 0.60 | 3.04 | 0.62 |  |  |
| 20.0   |    | 1.72                        | 0.53 | 2.03 | 0.55 | 2.33 | 0.58 | 2.70 | 0.61 | 2.94 | 0.63 |  |  |
| 22.0   |    | 1.69                        | 0.54 | 1.99 | 0.56 | 2.30 | 0.59 | 2.66 | 0.62 | 2.91 | 0.64 |  |  |
| 24.0   |    | 1.65                        | 0.54 | 1.95 | 0.57 | 2.26 | 0.59 | 2.63 | 0.62 | 2.87 | 0.64 |  |  |
| 25.0   |    | 1.63                        | 0.54 | 1.94 | 0.57 | 2.24 | 0.59 | 2.61 | 0.62 | 2.85 | 0.64 |  |  |
| 27.0   |    | 1.59                        | 0.55 | 1.90 | 0.57 | 2.20 | 0.60 | 2.57 | 0.63 | 2.81 | 0.65 |  |  |

#### Symbols

|      |                         |                        |
|------|-------------------------|------------------------|
| AFR: | Air flow rate           | (m <sup>3</sup> /min.) |
| BF:  | Bypass factor           |                        |
| EWB: | Entering wet bulb temp. | (°C)                   |
| EDB: | Entering dry bulb temp. | (°C)                   |
| TC:  | Total capacity          | (kW)                   |
| SHC: | Sensible heat capacity  | (kW)                   |
| PI:  | Power input             | (kW)                   |

#### NOTES

- Ratings shown are net capacities which include a deduction for indoor fan motor heat.
- shows nominal (rated) capacities and power input.
- TC, PI and SHC must be calculated by interpolation using the figures in the above tables. (Figures out of the tables should not be used for calculation.)
- About SHC which are not mentioned on the table, please calculate them with around values in direct proportion.
- Capacities are based on the following conditions.  
Corresponding refrigerant piping length: 5m  
Level difference: 0m
- Air flow rate (AFR) and Bypass factor (BF) are tabulated above table.

3D070643

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FTXS25J2V1B + RXS25J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 10.8 |
| BF  | 0.16 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 2.56                        | 2.18 | 0.41 | 2.44 | 2.13 | 0.45 | 2.33 | 2.08 | 0.49 | 2.28 | 2.05 | 0.51 | 2.21 | 2.02 | 0.53 | 2.10 | 1.97 | 0.57 |
| 16.0   | 22  | 2.68                        | 2.15 | 0.41 | 2.56 | 2.10 | 0.45 | 2.44 | 2.05 | 0.49 | 2.40 | 2.03 | 0.51 | 2.33 | 2.00 | 0.53 | 2.21 | 1.95 | 0.57 |
| 18.0   | 25  | 2.79                        | 2.29 | 0.42 | 2.68 | 2.24 | 0.45 | 2.56 | 2.20 | 0.49 | 2.51 | 2.18 | 0.51 | 2.44 | 2.15 | 0.53 | 2.33 | 2.10 | 0.57 |
| 19.0   | 27  | 2.85                        | 2.45 | 0.42 | 2.73 | 2.41 | 0.46 | 2.62 | 2.36 | 0.50 | 2.57 | 2.34 | 0.51 | 2.50 | 2.32 | 0.54 | 2.38 | 2.27 | 0.57 |
| 22.0   | 30  | 3.02                        | 2.38 | 0.42 | 2.91 | 2.34 | 0.46 | 2.79 | 2.30 | 0.50 | 2.74 | 2.28 | 0.51 | 2.67 | 2.26 | 0.54 | 2.56 | 2.22 | 0.58 |
| 24.0   | 32  | 3.14                        | 2.33 | 0.42 | 3.02 | 2.29 | 0.46 | 2.90 | 2.26 | 0.50 | 2.86 | 2.24 | 0.52 | 2.79 | 2.22 | 0.54 | 2.67 | 2.19 | 0.58 |

Heating 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 11.9 |
|-----|------|

| Indoor |  | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|--|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |  | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     |  | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   |  | 2.22                        | 0.60 | 2.59 | 0.63 | 2.97 | 0.66 | 3.41 | 0.69 | 3.71 | 0.72 |
| 20.0   |  | 2.11                        | 0.62 | 2.48 | 0.65 | 2.85 | 0.67 | 3.30 | 0.71 | 3.60 | 0.73 |
| 22.0   |  | 2.06                        | 0.62 | 2.43 | 0.65 | 2.81 | 0.68 | 3.25 | 0.72 | 3.55 | 0.74 |
| 24.0   |  | 2.02                        | 0.63 | 2.39 | 0.66 | 2.76 | 0.69 | 3.21 | 0.72 | 3.51 | 0.75 |
| 25.0   |  | 1.99                        | 0.63 | 2.37 | 0.66 | 2.74 | 0.69 | 3.19 | 0.73 | 3.48 | 0.75 |
| 27.0   |  | 1.95                        | 0.64 | 2.32 | 0.67 | 2.69 | 0.70 | 3.14 | 0.73 | 3.44 | 0.76 |

### Symbols

- AFR: Air flow rate (m<sup>3</sup>/min.)
- BF: Bypass factor
- EWB: Entering wet bulb temp. (°C)
- EDB: Entering dry bulb temp. (°C)
- TC: Total capacity (kW)
- SHC: Sensible heat capacity (kW)
- PI: Power input (kW)

### NOTES

1. Ratings shown are net capacities which include a deduction for indoor fan motor heat.
2. 

|  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.
3. TC, PI and SHC must be calculated by interpolation using the figures in the above tables. (Figures out of the tables should not be used for calculation.)
4. About SHC which are not mentioned on the table, please calculate them with around values in direct proportion.
5. Capacities are based on the following conditions.  
Corresponding refrigerant piping length: 5m  
Level difference: 0m
6. Air flow rate (AFR) and Bypass factor (BF) are tabulated above table.

## 4 Capacity tables

### 4 - 1 Cooling/Heating Capacity Tables

FFQ25B8V1B + RXS25J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 9    |
| BF  | 0.24 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 2.56                        | 1.95 | 0.56 | 2.44 | 1.89 | 0.61 | 2.33 | 1.84 | 0.67 | 2.28 | 1.81 | 0.69 | 2.21 | 1.78 | 0.72 | 2.10 | 1.72 | 0.78 |
| 16.0   | 22  | 2.68                        | 1.92 | 0.56 | 2.56 | 1.86 | 0.62 | 2.44 | 1.81 | 0.67 | 2.40 | 1.79 | 0.69 | 2.33 | 1.76 | 0.73 | 2.21 | 1.71 | 0.78 |
| 18.0   | 25  | 2.79                        | 2.01 | 0.57 | 2.68 | 1.96 | 0.62 | 2.56 | 1.92 | 0.67 | 2.51 | 1.90 | 0.70 | 2.44 | 1.87 | 0.73 | 2.33 | 1.82 | 0.78 |
| 19.0   | 27  | 2.85                        | 2.13 | 0.57 | 2.73 | 2.08 | 0.62 | 2.62 | 2.04 | 0.68 | 2.57 | 2.02 | 0.70 | 2.50 | 1.99 | 0.73 | 2.38 | 1.94 | 0.78 |
| 22.0   | 30  | 3.02                        | 2.06 | 0.57 | 2.91 | 2.02 | 0.63 | 2.79 | 1.97 | 0.68 | 2.74 | 1.96 | 0.70 | 2.67 | 1.93 | 0.73 | 2.56 | 1.89 | 0.79 |
| 24.0   | 32  | 3.14                        | 2.01 | 0.58 | 3.02 | 1.97 | 0.63 | 2.90 | 1.93 | 0.68 | 2.86 | 1.91 | 0.71 | 2.79 | 1.89 | 0.74 | 2.67 | 1.85 | 0.79 |

Heating 50 Hz 220V-240V

|     |   |
|-----|---|
| AFR | 9 |
|-----|---|

| Indoor |    | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|----|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |    | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     | °C | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   | 20 | 2.15                        | 0.78 | 2.52 | 0.82 | 2.88 | 0.85 | 3.31 | 0.90 | 3.60 | 0.93 |
| 20.0   | 20 | 2.04                        | 0.80 | 2.41 | 0.84 | 2.77 | 0.87 | 3.20 | 0.92 | 3.49 | 0.95 |
| 22.0   | 20 | 2.00                        | 0.81 | 2.36 | 0.84 | 2.72 | 0.88 | 3.16 | 0.93 | 3.44 | 0.96 |
| 24.0   | 20 | 1.96                        | 0.82 | 2.32 | 0.85 | 2.68 | 0.89 | 3.11 | 0.94 | 3.40 | 0.97 |
| 25.0   | 20 | 1.93                        | 0.82 | 2.29 | 0.86 | 2.66 | 0.90 | 3.09 | 0.94 | 3.38 | 0.97 |
| 27.0   | 20 | 1.89                        | 0.83 | 2.25 | 0.87 | 2.61 | 0.90 | 3.05 | 0.95 | 3.33 | 0.98 |

#### Symbols

|      |                         |                        |
|------|-------------------------|------------------------|
| AFR: | Air flow rate           | (m <sup>3</sup> /min.) |
| BF:  | Bypass factor           |                        |
| EWB: | Entering wet bulb temp. | (°C)                   |
| EDB: | Entering dry bulb temp. | (°C)                   |
| TC:  | Total capacity          | (kW)                   |
| SHC: | Sensible heat capacity  | (kW)                   |
| PI:  | Power input             | (kW)                   |

#### NOTES

- Capacities are based on the following conditions.
  - Corresponding refrigerant piping length: 5m
  - Level difference: 0m
- |  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.

3D055487C

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FLXS25BAVMB + RXS25J2V1B

Cooling 220V-240V 50 Hz

|     |      |
|-----|------|
| AFR | 7.6  |
| BF  | 0.32 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 2.52                        | 1.77 | 0.49 | 2.44 | 1.73 | 0.55 | 2.33 | 1.67 | 0.59 | 2.28 | 1.65 | 0.61 | 2.21 | 1.61 | 0.64 | 2.10 | 1.55 | 0.69 |
| 16.0   | 22  | 2.68                        | 1.76 | 0.50 | 2.56 | 1.71 | 0.55 | 2.44 | 1.65 | 0.60 | 2.40 | 1.63 | 0.62 | 2.33 | 1.59 | 0.65 | 2.21 | 1.54 | 0.69 |
| 18.0   | 25  | 2.79                        | 1.83 | 0.50 | 2.68 | 1.78 | 0.55 | 2.56 | 1.72 | 0.60 | 2.51 | 1.70 | 0.62 | 2.44 | 1.67 | 0.65 | 2.33 | 1.62 | 0.70 |
| 19.0   | 27  | 2.85                        | 1.91 | 0.51 | 2.73 | 1.86 | 0.55 | 2.62 | 1.81 | 0.60 | 2.57 | 1.79 | 0.62 | 2.50 | 1.76 | 0.65 | 2.38 | 1.71 | 0.70 |
| 22.0   | 30  | 3.02                        | 1.84 | 0.51 | 2.91 | 1.79 | 0.56 | 2.79 | 1.75 | 0.61 | 2.74 | 1.73 | 0.63 | 2.67 | 1.70 | 0.65 | 2.56 | 1.66 | 0.70 |
| 24.0   | 32  | 3.14                        | 1.79 | 0.51 | 3.02 | 1.74 | 0.56 | 2.90 | 1.70 | 0.61 | 2.86 | 1.68 | 0.63 | 2.79 | 1.66 | 0.66 | 2.67 | 1.62 | 0.71 |

Heating 220V-240V 50 Hz

|     |     |
|-----|-----|
| AFR | 9.2 |
|-----|-----|

| Indoor |  | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|--|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |  | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     |  | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   |  | 2.29                        | 0.83 | 2.67 | 0.87 | 3.06 | 0.91 | 3.52 | 0.96 | 3.82 | 0.99 |
| 20.0   |  | 2.17                        | 0.85 | 2.56 | 0.89 | 2.94 | 0.93 | 3.40 | 0.98 | 3.71 | 1.01 |
| 22.0   |  | 2.12                        | 0.86 | 2.51 | 0.90 | 2.89 | 0.94 | 3.35 | 0.99 | 3.66 | 1.02 |
| 24.0   |  | 2.08                        | 0.87 | 2.46 | 0.91 | 2.85 | 0.95 | 3.31 | 1.00 | 3.61 | 1.03 |
| 25.0   |  | 2.05                        | 0.87 | 2.44 | 0.91 | 2.82 | 0.95 | 3.28 | 1.00 | 3.59 | 1.03 |
| 27.0   |  | 2.01                        | 0.88 | 2.39 | 0.92 | 2.77 | 0.96 | 3.24 | 1.01 | 3.54 | 1.04 |

### Symbols

AFR: Air flow rate (m<sup>3</sup>/min.)  
 BF: Bypass factor  
 EWB: Entering wet bulb temp. (°C)  
 EDB: Entering dry bulb temp. (°C)  
 TC: Total capacity (kW)  
 SHC: Sensible heat capacity (kW)  
 PI: Power input (kW)

### NOTES

- Capacities are based on the following conditions.  
 (1) Corresponding refrigerant piping length: 5m  
 (2) Level difference: 0m
- shows nominal (rated) capacities and power input.

## 4 Capacity tables

### 4 - 1 Cooling/Heating Capacity Tables

FVXS25FV1B + RXS25J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 8.2  |
| BF  | 0.10 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 2.56                        | 2.00 | 0.44 | 2.44 | 1.95 | 0.48 | 2.33 | 1.89 | 0.52 | 2.28 | 1.87 | 0.54 | 2.21 | 1.84 | 0.56 | 2.10 | 1.78 | 0.61 |
| 16.0   | 22  | 2.68                        | 1.97 | 0.44 | 2.56 | 1.92 | 0.48 | 2.44 | 1.87 | 0.52 | 2.40 | 1.84 | 0.54 | 2.33 | 1.81 | 0.57 | 2.21 | 1.76 | 0.61 |
| 18.0   | 25  | 2.79                        | 2.08 | 0.44 | 2.68 | 2.03 | 0.48 | 2.56 | 1.98 | 0.53 | 2.51 | 1.96 | 0.54 | 2.44 | 1.93 | 0.57 | 2.33 | 1.89 | 0.61 |
| 19.0   | 27  | 2.85                        | 2.21 | 0.44 | 2.73 | 2.16 | 0.49 | 2.62 | 2.11 | 0.53 | 2.57 | 2.09 | 0.54 | 2.50 | 2.07 | 0.57 | 2.38 | 2.02 | 0.61 |
| 22.0   | 30  | 3.02                        | 2.13 | 0.45 | 2.91 | 2.09 | 0.49 | 2.79 | 2.05 | 0.53 | 2.74 | 2.03 | 0.55 | 2.67 | 2.01 | 0.57 | 2.56 | 1.97 | 0.62 |
| 24.0   | 32  | 3.14                        | 2.08 | 0.45 | 3.02 | 2.04 | 0.49 | 2.90 | 2.01 | 0.53 | 2.86 | 1.99 | 0.55 | 2.79 | 1.97 | 0.58 | 2.67 | 1.93 | 0.62 |

Heating 50 Hz 220V-240V

|     |     |
|-----|-----|
| AFR | 8.8 |
|-----|-----|

| Indoor |    | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|----|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |    | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     | °C | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   | 20 | 2.29                        | 0.67 | 2.67 | 0.70 | 3.06 | 0.73 | 3.52 | 0.77 | 3.82 | 0.80 |
| 20.0   | 25 | 2.17                        | 0.69 | 2.56 | 0.72 | 2.94 | 0.75 | 3.40 | 0.79 | 3.71 | 0.82 |
| 22.0   | 27 | 2.12                        | 0.69 | 2.51 | 0.73 | 2.89 | 0.76 | 3.35 | 0.80 | 3.66 | 0.82 |
| 24.0   | 29 | 2.08                        | 0.70 | 2.46 | 0.73 | 2.85 | 0.77 | 3.31 | 0.80 | 3.61 | 0.83 |
| 25.0   | 30 | 2.05                        | 0.70 | 2.44 | 0.74 | 2.82 | 0.77 | 3.28 | 0.81 | 3.59 | 0.83 |
| 27.0   | 32 | 2.01                        | 0.71 | 2.39 | 0.74 | 2.77 | 0.78 | 3.24 | 0.81 | 3.54 | 0.84 |

#### Symbols

|      |                         |                        |
|------|-------------------------|------------------------|
| AFR: | Air flow rate           | (m <sup>3</sup> /min.) |
| BF:  | Bypass factor           |                        |
| EWB: | Entering wet bulb temp. | (°C)                   |
| EDB: | Entering dry bulb temp. | (°C)                   |
| TC:  | Total capacity          | (kW)                   |
| SHC: | Sensible heat capacity  | (kW)                   |
| PI:  | Power input             | (kW)                   |

#### NOTES

- Capacities are based on the following conditions.
  - Corresponding refrigerant piping length: 5m
  - Level difference: 0m
- |  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.

3D056491C

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FVXS35FV1B + RXS35J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 8.5  |
| BF  | 0.11 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 3.59                        | 2.54 | 0.78 | 3.42 | 2.46 | 0.86 | 3.26 | 2.37 | 0.93 | 3.19 | 2.34 | 0.96 | 3.10 | 2.29 | 1.01 | 2.93 | 2.21 | 1.08 |
| 16.0   | 22  | 3.75                        | 2.50 | 0.79 | 3.58 | 2.42 | 0.86 | 3.42 | 2.34 | 0.94 | 3.36 | 2.31 | 0.97 | 3.26 | 2.26 | 1.01 | 3.10 | 2.18 | 1.09 |
| 18.0   | 25  | 3.91                        | 2.60 | 0.79 | 3.75 | 2.52 | 0.87 | 3.58 | 2.45 | 0.94 | 3.52 | 2.42 | 0.97 | 3.42 | 2.37 | 1.02 | 3.26 | 2.30 | 1.09 |
| 19.0   | 27  | 3.99                        | 2.72 | 0.79 | 3.83 | 2.65 | 0.87 | 3.66 | 2.57 | 0.94 | 3.60 | 2.55 | 0.97 | 3.50 | 2.50 | 1.02 | 3.34 | 2.43 | 1.10 |
| 22.0   | 30  | 4.23                        | 2.61 | 0.80 | 4.07 | 2.55 | 0.88 | 3.90 | 2.49 | 0.95 | 3.84 | 2.46 | 0.98 | 3.74 | 2.43 | 1.03 | 3.58 | 2.36 | 1.10 |
| 24.0   | 32  | 4.39                        | 2.54 | 0.81 | 4.23 | 2.48 | 0.88 | 4.07 | 2.42 | 0.96 | 4.00 | 2.40 | 0.99 | 3.90 | 2.37 | 1.03 | 3.74 | 2.31 | 1.11 |

Heating 50 Hz 220V-240V

|     |     |
|-----|-----|
| AFR | 9.4 |
|-----|-----|

| Indoor |  | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|--|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |  | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     |  | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   |  | 3.03                        | 1.03 | 3.54 | 1.08 | 4.05 | 1.13 | 4.66 | 1.19 | 5.06 | 1.23 |
| 20.0   |  | 2.87                        | 1.06 | 3.38 | 1.11 | 3.89 | 1.16 | 4.50 | 1.22 | 4.91 | 1.26 |
| 22.0   |  | 2.81                        | 1.07 | 3.32 | 1.12 | 3.83 | 1.17 | 4.44 | 1.23 | 4.84 | 1.27 |
| 24.0   |  | 2.75                        | 1.08 | 3.26 | 1.13 | 3.77 | 1.18 | 4.38 | 1.24 | 4.78 | 1.28 |
| 25.0   |  | 2.72                        | 1.09 | 3.23 | 1.14 | 3.73 | 1.19 | 4.34 | 1.25 | 4.75 | 1.29 |
| 27.0   |  | 2.66                        | 1.10 | 3.16 | 1.15 | 3.67 | 1.20 | 4.28 | 1.26 | 4.69 | 1.30 |

**Symbols**

- AFR: Air flow rate (m<sup>3</sup>/min.)
- BF: Bypass factor
- EWB: Entering wet bulb temp. (°C)
- EDB: Entering dry bulb temp. (°C)
- TC: Total capacity (kW)
- SHC: Sensible heat capacity (kW)
- PI: Power input (kW)

**NOTES**

1. Capacities are based on the following conditions.
  - (1) Corresponding refrigerant piping length: 5m
  - (2) Level difference: 0m
2. 

|  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.



## 4 Capacity tables

### 4 - 1 Cooling/Heating Capacity Tables

FBQ35C7VEB + RXS35J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 11.5 |
| BF  | 0.15 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 3.48                        | 2.70 | 0.90 | 3.33 | 2.62 | 0.98 | 3.17 | 2.55 | 1.07 | 3.10 | 2.52 | 1.11 | 3.01 | 2.47 | 1.16 | 2.85 | 2.40 | 1.24 |
| 16.0   | 22  | 3.64                        | 2.65 | 0.90 | 3.48 | 2.58 | 0.99 | 3.32 | 2.51 | 1.08 | 3.26 | 2.48 | 1.11 | 3.17 | 2.44 | 1.16 | 3.01 | 2.37 | 1.25 |
| 18.0   | 25  | 3.80                        | 2.80 | 0.91 | 3.64 | 2.73 | 0.99 | 3.48 | 2.66 | 1.08 | 3.42 | 2.64 | 1.12 | 3.32 | 2.60 | 1.17 | 3.16 | 2.53 | 1.25 |
| 19.0   | 27  | 3.87                        | 2.96 | 0.91 | 3.72 | 2.90 | 1.00 | 3.56 | 2.84 | 1.08 | 3.49 | 2.81 | 1.12 | 3.40 | 2.77 | 1.17 | 3.24 | 2.71 | 1.26 |
| 22.0   | 30  | 4.11                        | 2.86 | 0.92 | 3.95 | 2.81 | 1.00 | 3.79 | 2.75 | 1.09 | 3.73 | 2.73 | 1.13 | 3.63 | 2.70 | 1.18 | 3.48 | 2.64 | 1.26 |
| 24.0   | 32  | 4.27                        | 2.79 | 0.92 | 4.11 | 2.74 | 1.01 | 3.95 | 2.69 | 1.10 | 3.89 | 2.67 | 1.13 | 3.79 | 2.64 | 1.18 | 3.63 | 2.59 | 1.27 |

Heating 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 11.5 |
|-----|------|

| Indoor |  | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|--|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |  | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     |  | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   |  | 2.69                        | 1.03 | 3.14 | 1.08 | 3.60 | 1.13 | 4.14 | 1.19 | 4.50 | 1.23 |
| 20.0   |  | 2.55                        | 1.06 | 3.01 | 1.11 | 3.46 | 1.16 | 4.00 | 1.22 | 4.36 | 1.26 |
| 22.0   |  | 2.50                        | 1.07 | 2.95 | 1.12 | 3.40 | 1.17 | 3.94 | 1.23 | 4.31 | 1.27 |
| 24.0   |  | 2.44                        | 1.08 | 2.90 | 1.13 | 3.35 | 1.18 | 3.89 | 1.24 | 4.25 | 1.28 |
| 25.0   |  | 2.42                        | 1.09 | 2.87 | 1.14 | 3.32 | 1.19 | 3.86 | 1.25 | 4.22 | 1.29 |
| 27.0   |  | 2.36                        | 1.10 | 2.81 | 1.15 | 3.26 | 1.20 | 3.81 | 1.26 | 4.17 | 1.30 |

3D055493C

#### Symbols

|      |                         |                        |
|------|-------------------------|------------------------|
| AFR: | Air flow rate           | (m <sup>3</sup> /min.) |
| BF:  | Bypass factor           |                        |
| EWB: | Entering wet bulb temp. | (°C)                   |
| EDB: | Entering dry bulb temp. | (°C)                   |
| TC:  | Total capacity          | (kW)                   |
| SHC: | Sensible heat capacity  | (kW)                   |
| PI:  | Power input             | (kW)                   |

#### NOTES

- Capacities are based on the following conditions.
  - Corresponding refrigerant piping length: 5m
  - Level difference: 0m
- |  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FDXS35E7VMB + RXS35J2V1B

Cooling 220V-240V 50Hz

|     |      |
|-----|------|
| AFR | 8.7  |
| BF  | 0.17 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 3.48                        | 2.46 | 0.84 | 3.33 | 2.38 | 0.92 | 3.17 | 2.30 | 1.00 | 3.10 | 2.26 | 1.03 | 3.01 | 2.21 | 1.08 | 2.85 | 2.13 | 1.16 |
| 16.0   | 22  | 3.64                        | 2.42 | 0.84 | 3.48 | 2.34 | 0.92 | 3.32 | 2.26 | 1.00 | 3.26 | 2.23 | 1.03 | 3.17 | 2.19 | 1.08 | 3.01 | 2.11 | 1.16 |
| 18.0   | 25  | 3.80                        | 2.51 | 0.85 | 3.64 | 2.44 | 0.93 | 3.48 | 2.37 | 1.01 | 3.42 | 2.34 | 1.04 | 3.32 | 2.30 | 1.09 | 3.16 | 2.22 | 1.17 |
| 19.0   | 27  | 3.87                        | 2.63 | 0.85 | 3.72 | 2.56 | 0.93 | 3.56 | 2.49 | 1.01 | 3.49 | 2.46 | 1.04 | 3.40 | 2.42 | 1.09 | 3.24 | 2.35 | 1.17 |
| 22.0   | 30  | 4.11                        | 2.53 | 0.86 | 3.95 | 2.47 | 0.94 | 3.79 | 2.40 | 1.02 | 3.73 | 2.38 | 1.05 | 3.63 | 2.34 | 1.10 | 3.48 | 2.28 | 1.18 |
| 24.0   | 32  | 4.27                        | 2.46 | 0.86 | 4.11 | 2.40 | 0.94 | 3.95 | 2.34 | 1.02 | 3.89 | 2.32 | 1.05 | 3.79 | 2.29 | 1.10 | 3.63 | 2.23 | 1.18 |

Heating 220V-240V 50Hz

|     |     |
|-----|-----|
| AFR | 8.7 |
|-----|-----|

| Indoor |      | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |    |
|--------|------|-----------------------------|------|------|------|------|------|------|------|------|----|
| EDB    |      | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |    |
| °C     | °C   | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI |
| 15.0   | 2.69 | 1.00                        | 3.14 | 1.05 | 3.60 | 1.10 | 4.14 | 1.15 | 4.50 | 1.19 |    |
| 20.0   | 2.55 | 1.02                        | 3.01 | 1.07 | 3.46 | 1.12 | 4.00 | 1.18 | 4.36 | 1.22 |    |
| 22.0   | 2.50 | 1.04                        | 2.95 | 1.08 | 3.40 | 1.13 | 3.94 | 1.19 | 4.31 | 1.23 |    |
| 24.0   | 2.44 | 1.05                        | 2.90 | 1.09 | 3.35 | 1.14 | 3.89 | 1.20 | 4.25 | 1.24 |    |
| 25.0   | 2.42 | 1.05                        | 2.87 | 1.10 | 3.32 | 1.15 | 3.86 | 1.21 | 4.22 | 1.25 |    |
| 27.0   | 2.36 | 1.06                        | 2.81 | 1.11 | 3.26 | 1.16 | 3.81 | 1.22 | 4.17 | 1.26 |    |

### Symbols

- AFR: Air flow rate (m<sup>3</sup>/min.)
- BF: Bypass factor
- EWB: Entering wet bulb temp. (°C)
- EDB: Entering dry bulb temp. (°C)
- TC: Total capacity (kW)
- SHC: Sensible heat capacity (kW)
- PI: Power input (kW)

### NOTES

1. Capacities are based on the following conditions.
  - (1) Corresponding refrigerant piping length: 5m
  - (2) Level difference: 0m
2. 

|  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.

## 4 Capacity tables

### 4 - 1 Cooling/Heating Capacity Tables

FFQ35B8V1B + RXS35J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 10   |
| BF  | 0.25 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 3.48                        | 2.48 | 0.84 | 3.33 | 2.40 | 0.93 | 3.17 | 2.32 | 1.01 | 3.10 | 2.29 | 1.04 | 3.01 | 2.24 | 1.09 | 2.85 | 2.16 | 1.17 |
| 16.0   | 22  | 3.64                        | 2.44 | 0.85 | 3.48 | 2.36 | 0.93 | 3.32 | 2.28 | 1.01 | 3.26 | 2.25 | 1.04 | 3.17 | 2.21 | 1.09 | 3.01 | 2.13 | 1.17 |
| 18.0   | 25  | 3.80                        | 2.54 | 0.85 | 3.64 | 2.46 | 0.93 | 3.48 | 2.39 | 1.02 | 3.42 | 2.36 | 1.05 | 3.32 | 2.32 | 1.10 | 3.16 | 2.25 | 1.18 |
| 19.0   | 27  | 3.87                        | 2.66 | 0.86 | 3.72 | 2.59 | 0.94 | 3.56 | 2.52 | 1.02 | 3.49 | 2.49 | 1.05 | 3.40 | 2.45 | 1.10 | 3.24 | 2.39 | 1.18 |
| 22.0   | 30  | 4.11                        | 2.56 | 0.86 | 3.95 | 2.50 | 0.94 | 3.79 | 2.44 | 1.03 | 3.73 | 2.41 | 1.06 | 3.63 | 2.38 | 1.11 | 3.48 | 2.32 | 1.19 |
| 24.0   | 32  | 4.27                        | 2.49 | 0.87 | 4.11 | 2.43 | 0.95 | 3.95 | 2.37 | 1.03 | 3.89 | 2.35 | 1.06 | 3.79 | 2.32 | 1.11 | 3.63 | 2.26 | 1.19 |

Heating 50 Hz 220V-240V

|     |    |
|-----|----|
| AFR | 10 |
|-----|----|

| Indoor |    | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|----|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |    | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     | °C | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   | 20 | 2.69                        | 1.01 | 3.14 | 1.06 | 3.60 | 1.11 | 4.14 | 1.17 | 4.50 | 1.21 |
| 20.0   | 25 | 2.55                        | 1.04 | 3.01 | 1.09 | 3.46 | 1.14 | 4.00 | 1.20 | 4.36 | 1.24 |
| 22.0   | 27 | 2.50                        | 1.05 | 2.95 | 1.10 | 3.40 | 1.15 | 3.94 | 1.21 | 4.31 | 1.25 |
| 24.0   | 30 | 2.44                        | 1.06 | 2.90 | 1.11 | 3.35 | 1.16 | 3.89 | 1.22 | 4.25 | 1.26 |
| 25.0   | 32 | 2.42                        | 1.07 | 2.87 | 1.12 | 3.32 | 1.17 | 3.86 | 1.23 | 4.22 | 1.27 |
| 27.0   | 35 | 2.36                        | 1.08 | 2.81 | 1.13 | 3.26 | 1.18 | 3.81 | 1.24 | 4.17 | 1.28 |

#### Symbols

|      |                         |                        |
|------|-------------------------|------------------------|
| AFR: | Air flowrate            | (m <sup>3</sup> /min.) |
| BF:  | Bypass factor           |                        |
| EWB: | Entering wet bulb temp. | (°C)                   |
| EDB: | Entering dry bulb temp. | (°C)                   |
| TC:  | Total capacity          | (kW)                   |
| SHC: | Sensible heat capacity  | (kW)                   |
| PI:  | Power input             | (kW)                   |

#### NOTES

- Capacities are based on the following conditions.
  - Corresponding refrigerant piping length: 5m
  - Level difference: 0m
- |  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FHQ35BVV1B + RXS35J2V1B

Cooling 220V-240V 50 Hz

|     |      |
|-----|------|
| AFR | 13   |
| BF  | 0.20 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 3.48                        | 2.76 | 0.81 | 3.33 | 2.69 | 0.88 | 3.17 | 2.61 | 0.96 | 3.10 | 2.58 | 0.99 | 3.01 | 2.54 | 1.04 | 2.85 | 2.47 | 1.12 |
| 16.0   | 22  | 3.64                        | 2.72 | 0.81 | 3.48 | 2.65 | 0.89 | 3.32 | 2.58 | 0.97 | 3.26 | 2.55 | 1.00 | 3.17 | 2.51 | 1.04 | 3.01 | 2.44 | 1.12 |
| 18.0   | 25  | 3.80                        | 2.87 | 0.81 | 3.64 | 2.81 | 0.89 | 3.48 | 2.74 | 0.97 | 3.42 | 2.72 | 1.00 | 3.32 | 2.68 | 1.05 | 3.16 | 2.61 | 1.13 |
| 19.0   | 27  | 3.87                        | 3.05 | 0.82 | 3.72 | 2.99 | 0.89 | 3.56 | 2.93 | 0.97 | 3.49 | 2.90 | 1.00 | 3.40 | 2.87 | 1.05 | 3.24 | 2.80 | 1.13 |
| 22.0   | 30  | 4.11                        | 2.95 | 0.82 | 3.95 | 2.90 | 0.90 | 3.79 | 2.84 | 0.98 | 3.73 | 2.82 | 1.01 | 3.63 | 2.79 | 1.06 | 3.48 | 2.73 | 1.13 |
| 24.0   | 32  | 4.27                        | 2.88 | 0.83 | 4.11 | 2.83 | 0.91 | 3.95 | 2.78 | 0.98 | 3.89 | 2.76 | 1.02 | 3.79 | 2.73 | 1.06 | 3.63 | 2.68 | 1.14 |

Heating 220V-240V 50 Hz

|     |    |
|-----|----|
| AFR | 13 |
|-----|----|

| Indoor |  | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|--|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |  | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     |  | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   |  | 2.69                        | 0.94 | 3.14 | 0.98 | 3.60 | 1.03 | 4.14 | 1.08 | 4.50 | 1.12 |
| 20.0   |  | 2.55                        | 0.96 | 3.01 | 1.01 | 3.46 | 1.06 | 4.00 | 1.11 | 4.36 | 1.15 |
| 22.0   |  | 2.50                        | 0.97 | 2.95 | 1.02 | 3.40 | 1.07 | 3.94 | 1.12 | 4.31 | 1.16 |
| 24.0   |  | 2.44                        | 0.98 | 2.90 | 1.03 | 3.35 | 1.08 | 3.89 | 1.13 | 4.25 | 1.17 |
| 25.0   |  | 2.42                        | 0.99 | 2.87 | 1.03 | 3.32 | 1.08 | 3.86 | 1.14 | 4.22 | 1.17 |
| 27.0   |  | 2.36                        | 1.00 | 2.81 | 1.04 | 3.26 | 1.09 | 3.81 | 1.15 | 4.17 | 1.18 |

**Symbols**

- AFR: Air flow rate (m<sup>3</sup>/min.)
- BF: Bypass factor
- EWB: Entering wet bulb temp. (°C)
- EDB: Entering dry bulb temp. (°C)
- TC: Total capacity (kW)
- SHC: Sensible heat capacity (kW)
- PI: Power input (kW)

**NOTES**

1. Capacities are based on the following conditions.
  - (1) Corresponding refrigerant piping length: 5m
  - (2) Level difference: 0m
2.  shows nominal (rated) capacities and power input.

## 4 Capacity tables

### 4 - 1 Cooling/Heating Capacity Tables

FLXS35BAVMB + RXS35J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 8.6  |
| BF  | 0.35 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 2.72                        | 1.92 | 0.87 | 2.72 | 1.92 | 0.95 | 2.72 | 1.92 | 1.03 | 2.72 | 1.92 | 1.07 | 2.72 | 1.92 | 1.12 | 2.72 | 1.92 | 1.20 |
| 16.0   | 22  | 3.34                        | 2.14 | 0.87 | 3.34 | 2.14 | 0.96 | 3.34 | 2.14 | 1.04 | 3.34 | 2.14 | 1.07 | 3.26 | 2.10 | 1.12 | 3.10 | 2.01 | 1.21 |
| 18.0   | 25  | 3.91                        | 2.42 | 0.88 | 3.75 | 2.34 | 0.96 | 3.58 | 2.26 | 1.04 | 3.52 | 2.22 | 1.08 | 3.42 | 2.17 | 1.13 | 3.26 | 2.09 | 1.21 |
| 19.0   | 27  | 3.99                        | 2.51 | 0.88 | 3.83 | 2.43 | 0.96 | 3.66 | 2.34 | 1.05 | 3.60 | 2.31 | 1.08 | 3.50 | 2.27 | 1.13 | 3.34 | 2.19 | 1.21 |
| 22.0   | 30  | 4.23                        | 2.40 | 0.89 | 4.07 | 2.33 | 0.97 | 3.90 | 2.26 | 1.05 | 3.84 | 2.23 | 1.09 | 3.74 | 2.19 | 1.14 | 3.58 | 2.12 | 1.22 |
| 24.0   | 32  | 4.39                        | 2.32 | 0.89 | 4.23 | 2.26 | 0.98 | 4.07 | 2.19 | 1.06 | 4.00 | 2.16 | 1.09 | 3.90 | 2.13 | 1.14 | 3.74 | 2.06 | 1.23 |

Heating 50 Hz 220V-240V

|     |     |
|-----|-----|
| AFR | 9.8 |
|-----|-----|

| Indoor |    | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|----|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |    | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     | °C | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   | 20 | 2.69                        | 1.04 | 3.14 | 1.09 | 3.60 | 1.14 | 4.14 | 1.20 | 4.50 | 1.24 |
| 20.0   | 25 | 2.55                        | 1.07 | 3.01 | 1.12 | 3.46 | 1.17 | 4.00 | 1.23 | 4.36 | 1.27 |
| 22.0   | 27 | 2.50                        | 1.08 | 2.95 | 1.13 | 3.40 | 1.18 | 3.94 | 1.24 | 4.31 | 1.28 |
| 24.0   | 30 | 2.44                        | 1.09 | 2.90 | 1.14 | 3.35 | 1.19 | 3.89 | 1.25 | 4.25 | 1.29 |
| 25.0   | 32 | 2.42                        | 1.10 | 2.87 | 1.15 | 3.32 | 1.20 | 3.86 | 1.26 | 4.18 | 1.30 |
| 27.0   | 35 | 2.36                        | 1.11 | 2.81 | 1.16 | 3.26 | 1.21 | 3.81 | 1.27 | 3.91 | 1.30 |

#### Symbols

|      |                         |                        |
|------|-------------------------|------------------------|
| AFR: | Air flow rate           | (m <sup>3</sup> /min.) |
| BF:  | Bypass factor           |                        |
| EWB: | Entering wet bulb temp. | (°C)                   |
| EDB: | Entering dry bulb temp. | (°C)                   |
| TC:  | Total capacity          | (kW)                   |
| SHC: | Sensible heat capacity  | (kW)                   |
| PI:  | Power input             | (kW)                   |

#### NOTES

- Capacities are based on the following conditions.
  - Corresponding refrigerant piping length: 5m
  - Level difference: 0m
- |  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.

3D055039C

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FTXS35J2V1B + RXS35J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 11.4 |
| BF  | 0.21 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 3.59                        | 2.67 | 0.66 | 3.42 | 2.59 | 0.72 | 3.26 | 2.51 | 0.79 | 3.19 | 2.48 | 0.81 | 3.10 | 2.43 | 0.85 | 2.93 | 2.35 | 0.91 |
| 16.0   | 22  | 3.75                        | 2.63 | 0.66 | 3.58 | 2.55 | 0.73 | 3.42 | 2.48 | 0.79 | 3.36 | 2.45 | 0.82 | 3.26 | 2.40 | 0.85 | 3.10 | 2.33 | 0.92 |
| 18.0   | 25  | 3.91                        | 2.75 | 0.67 | 3.75 | 2.68 | 0.73 | 3.58 | 2.61 | 0.79 | 3.52 | 2.58 | 0.82 | 3.42 | 2.54 | 0.86 | 3.26 | 2.47 | 0.92 |
| 19.0   | 27  | 3.99                        | 2.91 | 0.67 | 3.83 | 2.84 | 0.73 | 3.66 | 2.77 | 0.80 | 3.60 | 2.74 | 0.82 | 3.50 | 2.70 | 0.86 | 3.34 | 2.64 | 0.92 |
| 22.0   | 30  | 4.23                        | 2.80 | 0.67 | 4.07 | 2.74 | 0.74 | 3.90 | 2.68 | 0.80 | 3.84 | 2.66 | 0.83 | 3.74 | 2.62 | 0.87 | 3.58 | 2.57 | 0.93 |
| 24.0   | 32  | 4.39                        | 2.73 | 0.68 | 4.23 | 2.67 | 0.74 | 4.07 | 2.62 | 0.81 | 4.00 | 2.60 | 0.83 | 3.90 | 2.57 | 0.87 | 3.74 | 2.51 | 0.93 |

Heating 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 12.1 |
|-----|------|

| Indoor |  | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|--|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |  | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     |  | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   |  | 2.69                        | 0.80 | 3.14 | 0.84 | 3.60 | 0.88 | 4.14 | 0.93 | 4.50 | 0.96 |
| 20.0   |  | 2.55                        | 0.82 | 3.01 | 0.86 | 3.46 | 0.90 | 4.00 | 0.95 | 4.36 | 0.98 |
| 22.0   |  | 2.50                        | 0.83 | 2.95 | 0.87 | 3.40 | 0.91 | 3.94 | 0.96 | 4.31 | 0.99 |
| 24.0   |  | 2.44                        | 0.84 | 2.90 | 0.88 | 3.35 | 0.92 | 3.89 | 0.97 | 4.25 | 1.00 |
| 25.0   |  | 2.42                        | 0.85 | 2.87 | 0.89 | 3.32 | 0.92 | 3.86 | 0.97 | 4.22 | 1.00 |
| 27.0   |  | 2.36                        | 0.85 | 2.81 | 0.89 | 3.26 | 0.93 | 3.81 | 0.98 | 4.17 | 1.01 |

### Symbols

- AFR: Air flow rate (m<sup>3</sup>/min.)
- BF: Bypass factor
- EWB: Entering wet bulb temp. (°C)
- EDB: Entering dry bulb temp. (°C)
- TC: Total capacity (kW)
- SHC: Sensible heat capacity (kW)
- PI: Power input (kW)

### NOTES

1. Ratings shown are net capacities which include a deduction for indoor fan motor heat.
2. 

|  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.
3. TC, PI and SHC must be calculated by interpolation using the figures in the above tables. (Figures out of the tables should not be used for calculation.)
4. About SHC which are not mentioned on the table, please calculate them with around values in direct proportion.
5. Capacities are based on the following conditions.  
Corresponding refrigerant piping length: 5m  
Level difference: 0m
6. Air flow rate (AFR) and Bypass factor (BF) are tabulated above table.

3D070670A

## 4 Capacity tables

### 4 - 1 Cooling/Heating Capacity Tables

FTXS42J2V1B + RXS42J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 11.3 |
| BF  | 0.14 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 4.30                        | 3.10 | 0.93 | 4.11 | 3.00 | 1.02 | 3.91 | 2.90 | 1.11 | 3.83 | 2.87 | 1.14 | 3.72 | 2.81 | 1.20 | 3.52 | 2.71 | 1.29 |
| 16.0   | 22  | 4.50                        | 3.05 | 0.93 | 4.30 | 2.96 | 1.02 | 4.11 | 2.86 | 1.11 | 4.03 | 2.83 | 1.15 | 3.91 | 2.77 | 1.20 | 3.71 | 2.68 | 1.29 |
| 18.0   | 25  | 4.69                        | 3.18 | 0.94 | 4.49 | 3.09 | 1.03 | 4.30 | 3.01 | 1.12 | 4.22 | 2.97 | 1.15 | 4.10 | 2.92 | 1.21 | 3.91 | 2.83 | 1.30 |
| 19.0   | 27  | 4.79                        | 3.34 | 0.94 | 4.59 | 3.26 | 1.03 | 4.40 | 3.17 | 1.12 | 4.32 | 3.14 | 1.16 | 4.20 | 3.09 | 1.21 | 4.00 | 3.01 | 1.30 |
| 22.0   | 30  | 5.08                        | 3.22 | 0.95 | 4.88 | 3.14 | 1.04 | 4.69 | 3.07 | 1.13 | 4.61 | 3.04 | 1.16 | 4.49 | 2.99 | 1.22 | 4.29 | 2.92 | 1.31 |
| 24.0   | 32  | 5.27                        | 3.13 | 0.96 | 5.07 | 3.06 | 1.04 | 4.88 | 2.99 | 1.13 | 4.80 | 2.96 | 1.17 | 4.68 | 2.92 | 1.22 | 4.49 | 2.86 | 1.31 |

Heating 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 12.2 |
|-----|------|

| Indoor |    | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|----|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |    | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     | °C | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   |    | 3.64                        | 1.23 | 4.24 | 1.29 | 4.85 | 1.35 | 5.59 | 1.42 | 6.07 | 1.47 |
| 20.0   |    | 3.45                        | 1.26 | 4.06 | 1.32 | 4.67 | 1.38 | 5.40 | 1.45 | 5.89 | 1.50 |
| 22.0   |    | 3.37                        | 1.27 | 3.98 | 1.33 | 4.59 | 1.39 | 5.33 | 1.46 | 5.81 | 1.51 |
| 24.0   |    | 3.30                        | 1.29 | 3.91 | 1.34 | 4.52 | 1.40 | 5.25 | 1.48 | 5.74 | 1.52 |
| 25.0   |    | 3.26                        | 1.29 | 3.87 | 1.35 | 4.48 | 1.41 | 5.21 | 1.48 | 5.70 | 1.53 |
| 27.0   |    | 3.19                        | 1.30 | 3.80 | 1.36 | 4.41 | 1.42 | 5.14 | 1.50 | 5.63 | 1.54 |

#### Symbols

|      |                         |                        |
|------|-------------------------|------------------------|
| AFR: | Air flow rate           | (m <sup>3</sup> /min.) |
| BF:  | Bypass factor           |                        |
| EWB: | Entering wet bulb temp. | (°C)                   |
| EDB: | Entering dry bulb temp. | (°C)                   |
| TC:  | Total capacity          | (kW)                   |
| SHC: | Sensible heat capacity  | (kW)                   |
| PI:  | Power input             | (kW)                   |

#### NOTES

- Ratings shown are net capacities which include a deduction for indoor fan motor heat.
- shows nominal (rated) capacities and power input.
- TC, PI and SHC must be calculated by interpolation using the figures in the above tables. (Figures out of the tables should not be used for calculation.)
- About SHC which are not mentioned on the table, please calculate them with around values in direct proportion.
- Capacities are based on the following conditions.  
Corresponding refrigerant piping length: 5m  
Level difference: 0m
- Air flow rate (AFR) and Bypass factor (BF) are tabulated above table.

3D070646

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FDXS50C7VMB + RXS50J2V1B

Cooling 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 12.0 |
| BF  | 0.11 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 3.92                        | 2.76 | 1.13 | 3.92 | 2.76 | 1.29 | 3.92 | 2.76 | 1.44 | 3.92 | 2.76 | 1.50 | 3.92 | 2.76 | 1.59 | 3.92 | 2.76 | 1.74 |
| 16.0   | 22  | 4.81                        | 3.08 | 1.22 | 4.81 | 3.08 | 1.37 | 4.81 | 3.08 | 1.51 | 4.79 | 3.07 | 1.57 | 4.65 | 3.00 | 1.64 | 4.42 | 2.88 | 1.76 |
| 18.0   | 25  | 5.58                        | 3.47 | 1.28 | 5.35 | 3.35 | 1.40 | 5.12 | 3.23 | 1.52 | 5.02 | 3.18 | 1.57 | 4.88 | 3.11 | 1.65 | 4.65 | 3.00 | 1.77 |
| 19.0   | 27  | 5.70                        | 3.59 | 1.28 | 5.47 | 3.47 | 1.41 | 5.23 | 3.36 | 1.53 | 5.14 | 3.31 | 1.58 | 5.00 | 3.24 | 1.65 | 4.77 | 3.13 | 1.77 |
| 22.0   | 30  | 6.04                        | 3.44 | 1.30 | 5.81 | 3.33 | 1.42 | 5.58 | 3.23 | 1.54 | 5.49 | 3.19 | 1.59 | 5.35 | 3.13 | 1.66 | 5.11 | 3.03 | 1.78 |
| 24.0   | 32  | 6.27                        | 3.32 | 1.30 | 6.04 | 3.23 | 1.42 | 5.81 | 3.13 | 1.55 | 5.72 | 3.10 | 1.60 | 5.58 | 3.04 | 1.67 | 5.34 | 2.95 | 1.79 |

Heating 50 Hz 220V-240V

|     |      |
|-----|------|
| AFR | 12.0 |
|-----|------|

| Indoor |  | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|--|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |  | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     |  | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   |  | 3.90                        | 1.62 | 4.56 | 1.70 | 5.21 | 1.78 | 6.00 | 1.88 | 6.52 | 1.94 |
| 20.0   |  | 3.70                        | 1.67 | 4.36 | 1.75 | 5.01 | 1.83 | 5.80 | 1.92 | 6.32 | 1.98 |
| 22.0   |  | 3.62                        | 1.68 | 4.28 | 1.76 | 4.93 | 1.84 | 5.72 | 1.94 | 6.24 | 2.00 |
| 24.0   |  | 3.54                        | 1.70 | 4.20 | 1.78 | 4.85 | 1.86 | 5.64 | 1.95 | 6.16 | 2.02 |
| 25.0   |  | 3.50                        | 1.71 | 4.16 | 1.79 | 4.81 | 1.87 | 5.60 | 1.96 | 6.12 | 2.03 |
| 27.0   |  | 3.42                        | 1.73 | 4.08 | 1.81 | 4.73 | 1.89 | 5.52 | 1.98 | 6.04 | 2.04 |

### Symbols

- AFR: Air flow rate (m<sup>3</sup>/min.)
- BF: Bypass factor
- EWB: Entering wet bulb temp. (°C)
- EDB: Entering dry bulb temp. (°C)
- TC: Total capacity (kW)
- SHC: Sensible heat capacity (kW)
- PI: Power input (kW)

### NOTES

1. Ratings shown are net capacities which include a deduction for indoor fan motor heat.
2. 

|  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.
3. TC, PI and SHC must be calculated by interpolation using the figures in the above tables. (Figures out of the tables should not be used for calculation.)
4. About SHC which are not mentioned on the table, please calculate them with around values in direct proportion.
5. Capacities are based on the following conditions.  
Corresponding refrigerant piping length: 5m  
Level difference: 0m
6. Air flow rate (AFR) and Bypass factor (BF) are tabulated above table.



# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FFQ50B8V1B + RXS50J2V1B

Cooling 50 Hz 230V

|     |      |
|-----|------|
| AFR | 12.0 |
| BF  | 0.16 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 4.76                        | 3.51 | 1.45 | 4.61 | 3.44 | 1.55 | 4.46 | 3.37 | 1.64 | 4.40 | 3.34 | 1.68 | 4.31 | 3.30 | 1.74 | 4.16 | 3.23 | 1.83 |
| 16.0   | 22  | 4.92                        | 3.54 | 1.48 | 4.77 | 3.47 | 1.57 | 4.62 | 3.40 | 1.67 | 4.56 | 3.38 | 1.70 | 4.47 | 3.33 | 1.76 | 4.32 | 3.26 | 1.86 |
| 18.0   | 25  | 5.07                        | 3.58 | 1.50 | 4.92 | 3.51 | 1.60 | 4.77 | 3.44 | 1.69 | 4.71 | 3.41 | 1.73 | 4.62 | 3.37 | 1.79 | 4.47 | 3.30 | 1.88 |
| 19.0   | 27  | 5.15                        | 3.59 | 1.52 | 5.00 | 3.52 | 1.61 | 4.85 | 3.45 | 1.71 | 4.79 | 3.43 | 1.74 | 4.70 | 3.38 | 1.80 | 4.55 | 3.31 | 1.90 |
| 22.0   | 30  | 5.38                        | 3.65 | 1.55 | 5.23 | 3.58 | 1.65 | 5.08 | 3.51 | 1.74 | 5.02 | 3.48 | 1.78 | 4.93 | 3.44 | 1.84 | 4.78 | 3.37 | 1.93 |
| 24.0   | 32  | 5.54                        | 3.68 | 1.58 | 5.39 | 3.61 | 1.68 | 5.24 | 3.54 | 1.77 | 5.18 | 3.51 | 1.81 | 5.09 | 3.47 | 1.87 | 4.94 | 3.40 | 1.96 |

Heating 50 Hz 230V

|     |      |
|-----|------|
| AFR | 12.0 |
|-----|------|

| Indoor |    | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |      |      |
|--------|----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|
| EDB    |    | -15                         |      | -10  |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     | °C | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 16.0   | 20 | 2.76                        | 1.41 | 3.43 | 1.51 | 4.09 | 1.60 | 4.76 | 1.70 | 5.56 | 1.82 | 6.09 | 1.90 |
| 18.0   | 20 | 2.73                        | 1.48 | 3.40 | 1.58 | 4.06 | 1.67 | 4.73 | 1.77 | 5.53 | 1.89 | 6.06 | 1.97 |
| 20.0   | 20 | 2.70                        | 1.55 | 3.37 | 1.65 | 4.04 | 1.74 | 4.70 | 1.84 | 5.50 | 1.96 | 6.03 | 2.04 |
| 21.0   | 20 | 2.69                        | 1.58 | 3.36 | 1.68 | 4.02 | 1.78 | 4.69 | 1.88 | 5.49 | 2.00 | 6.02 | 2.07 |
| 22.0   | 20 | 2.68                        | 1.62 | 3.34 | 1.72 | 4.01 | 1.81 | 4.67 | 1.91 | 5.47 | 2.03 | 6.00 | 2.11 |
| 24.0   | 20 | 2.65                        | 1.69 | 3.32 | 1.79 | 3.98 | 1.89 | 4.65 | 1.98 | 5.45 | 2.10 | 5.98 | 2.18 |

### Symbols

- AFR: Air flow rate (m<sup>3</sup>/min.)
- BF: Bypass factor
- EWB: Entering wet bulb temp. (°C)
- EDB: Entering dry bulb temp. (°C)
- TC: Total capacity (kW)
- SHC: Sensible heat capacity (kW)
- PI: Power input (kW)

### NOTES

1. Ratings shown are net capacities which include a deduction for indoor fan motor heat.
2.  shows nominal (rated) capacities and power input.
3. TC, PI and SHC must be calculated by interpolation using the figures in the above tables. (Figures out of the tables should not be used for calculation.)
4. SHC is based on each EWB and EDB.  
 $SHC^* = SHC - 0.02 \times AFR(m^3/min.) \times (1 - BF) \times (DB - EDB)$   
 Add SHC\* TO SHC.
5. Capacities are based on the following conditions.  
 Corresponding refrigerant piping length: 5m  
 Level difference: 0m
6. Air flow rate (AFR) and Bypass factor (BF) are tabulated above table.

3D060463B

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FLXS50BAVMB + RXS50J2V1B

Cooling 50 Hz 220-240V

|     |      |
|-----|------|
| AFR | 11.4 |
| BF  | 0.18 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 4.96                        | 3.26 | 1.37 | 4.81 | 3.19 | 1.47 | 4.66 | 3.12 | 1.56 | 4.60 | 3.09 | 1.60 | 4.51 | 3.05 | 1.66 | 4.36 | 2.98 | 1.75 |
| 16.0   | 22  | 5.12                        | 3.30 | 1.40 | 4.97 | 3.23 | 1.49 | 4.82 | 3.16 | 1.59 | 4.76 | 3.13 | 1.62 | 4.67 | 3.09 | 1.68 | 4.52 | 3.02 | 1.78 |
| 18.0   | 25  | 5.27                        | 3.33 | 1.42 | 5.12 | 3.26 | 1.52 | 4.97 | 3.19 | 1.61 | 4.91 | 3.16 | 1.65 | 4.82 | 3.12 | 1.71 | 4.67 | 3.05 | 1.80 |
| 19.0   | 27  | 5.35                        | 3.35 | 1.44 | 5.20 | 3.28 | 1.53 | 5.05 | 3.21 | 1.63 | 4.99 | 3.18 | 1.66 | 4.90 | 3.14 | 1.72 | 4.75 | 3.07 | 1.82 |
| 22.0   | 30  | 5.58                        | 3.40 | 1.47 | 5.43 | 3.33 | 1.57 | 5.28 | 3.26 | 1.66 | 5.22 | 3.23 | 1.70 | 5.13 | 3.19 | 1.76 | 4.98 | 3.12 | 1.85 |
| 24.0   | 32  | 5.74                        | 3.43 | 1.50 | 5.59 | 3.36 | 1.60 | 5.44 | 3.29 | 1.69 | 5.38 | 3.26 | 1.73 | 5.29 | 3.22 | 1.79 | 5.14 | 3.15 | 1.88 |

Heating 50 Hz 220-240V

|     |      |
|-----|------|
| AFR | 12.1 |
|-----|------|

| Indoor |      | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |      |      |
|--------|------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|
| EDB    |      | -15                         |      | -10  |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     | °C   | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 16.0   | 16.0 | 3.06                        | 1.31 | 3.80 | 1.40 | 4.54 | 1.49 | 5.28 | 1.58 | 6.16 | 1.69 | 6.75 | 1.76 |
| 18.0   | 18.0 | 3.03                        | 1.37 | 3.77 | 1.46 | 4.51 | 1.55 | 5.24 | 1.65 | 6.13 | 1.75 | 6.72 | 1.83 |
| 20.0   | 20.0 | 3.00                        | 1.44 | 3.74 | 1.53 | 4.48 | 1.62 | 5.21 | 1.71 | 6.10 | 1.82 | 6.69 | 1.89 |
| 21.0   | 21.0 | 2.98                        | 1.47 | 3.72 | 1.56 | 4.46 | 1.65 | 5.20 | 1.74 | 6.08 | 1.85 | 6.68 | 1.93 |
| 22.0   | 22.0 | 2.97                        | 1.50 | 3.71 | 1.59 | 4.45 | 1.69 | 5.18 | 1.78 | 6.07 | 1.89 | 6.66 | 1.96 |
| 24.0   | 24.0 | 2.94                        | 1.57 | 3.68 | 1.66 | 4.42 | 1.75 | 5.15 | 1.84 | 6.04 | 1.95 | 6.63 | 2.02 |

### Symbols

- AFR: Air flow rate (m<sup>3</sup>/min.)
- BF: Bypass factor
- EWB: Entering wet bulb temp. (°C)
- EDB: Entering dry bulb temp. (°C)
- TC: Total capacity (kW)
- SHC: Sensible heat capacity (kW)
- PI: Power input (kW)

### NOTES

1. Ratings shown are net capacities which include a deduction for indoor fan motor heat.
2. 

|  |
|--|
|  |
|--|

 shows nominal (rated) capacities and power input.
3. TC, PI and SHC must be calculated by interpolation using the figures in the above tables. (Figures out of the tables should not be used for calculation.)
4. About SHC which are not mentioned on the table, please calculate them with around values in direct proportion.
5. Capacities are based on the following conditions.  
Corresponding refrigerant piping length: 5m  
Level difference: 0m
6. Air flow rate (AFR) and Bypass factor (BF) are tabulated above table.

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FTXS50J2V1B + RXS50J2V1B

**Cooling**      **50 Hz 220V-240V**

|     |      |
|-----|------|
| AFR | 11.6 |
| BF  | 0.18 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 4.62                        | 3.26 | 1.07 | 4.62 | 3.26 | 1.20 | 4.62 | 3.26 | 1.33 | 4.56 | 3.22 | 1.38 | 4.42 | 3.15 | 1.44 | 4.19 | 3.03 | 1.55 |
| 16.0   | 22  | 5.35                        | 3.47 | 1.13 | 5.12 | 3.34 | 1.23 | 4.89 | 3.23 | 1.34 | 4.79 | 3.18 | 1.39 | 4.65 | 3.11 | 1.45 | 4.42 | 3.00 | 1.56 |
| 18.0   | 25  | 5.58                        | 3.58 | 1.13 | 5.35 | 3.47 | 1.24 | 5.12 | 3.36 | 1.35 | 5.02 | 3.31 | 1.39 | 4.88 | 3.25 | 1.46 | 4.65 | 3.14 | 1.56 |
| 19.0   | 27  | 5.70                        | 3.73 | 1.14 | 5.47 | 3.62 | 1.24 | 5.23 | 3.51 | 1.35 | 5.14 | 3.47 | 1.40 | 5.00 | 3.41 | 1.46 | 4.77 | 3.31 | 1.57 |
| 22.0   | 30  | 6.04                        | 3.58 | 1.15 | 5.81 | 3.48 | 1.25 | 5.58 | 3.39 | 1.36 | 5.49 | 3.35 | 1.40 | 5.35 | 3.30 | 1.47 | 5.11 | 3.20 | 1.58 |
| 24.0   | 32  | 6.27                        | 3.47 | 1.15 | 6.04 | 3.38 | 1.26 | 5.81 | 3.30 | 1.37 | 5.72 | 3.26 | 1.41 | 5.58 | 3.21 | 1.48 | 5.34 | 3.13 | 1.58 |

**Heating**      **50 Hz 220V-240V**

|     |      |
|-----|------|
| AFR | 12.1 |
|-----|------|

| Indoor |    | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|----|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |    | -10                         |      | -5   |      | 0    |      | 6    |      | 10   |      |
| °C     | °C | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   |    | 3.90                        | 1.29 | 4.56 | 1.36 | 5.21 | 1.42 | 6.00 | 1.50 | 6.52 | 1.55 |
| 20.0   |    | 3.70                        | 1.33 | 4.36 | 1.39 | 5.01 | 1.45 | 5.80 | 1.53 | 6.32 | 1.58 |
| 22.0   |    | 3.62                        | 1.34 | 4.28 | 1.41 | 4.93 | 1.47 | 5.72 | 1.54 | 6.24 | 1.59 |
| 24.0   |    | 3.54                        | 1.36 | 4.20 | 1.42 | 4.85 | 1.48 | 5.64 | 1.56 | 6.16 | 1.61 |
| 25.0   |    | 3.50                        | 1.36 | 4.16 | 1.43 | 4.81 | 1.49 | 5.60 | 1.56 | 6.12 | 1.61 |
| 27.0   |    | 3.42                        | 1.38 | 4.08 | 1.44 | 4.73 | 1.50 | 5.52 | 1.58 | 6.04 | 1.63 |

**Symbols**

- AFR: Air flow rate (m<sup>3</sup>/min.)
- BF: Bypass factor
- EWB: Entering wet bulb temp. (°C)
- EDB: Entering dry bulb temp. (°C)
- TC: Total capacity (kW)
- SHC: Sensible heat capacity (kW)
- PI: Power input (kW)

**NOTES**

1. Ratings shown are net capacities which include a deduction for indoor fan motor heat.
2.  shows nominal (rated) capacities and power input.
3. TC, PI and SHC must be calculated by interpolation using the figures in the above tables. (Figures out of the tables should not be used for calculation.)
4. About SHC which are not mentioned on the table, please calculate them with around values in direct proportion.
5. Capacities are based on the following conditions.  
 Corresponding refrigerant piping length: 5m  
 Level difference: 0m
6. Air flow rate (AFR) and Bypass factor (BF) are tabulated above table.

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

### FVXS50FV1B + RXS50J2V1B

**Cooling**      **50 Hz 220V-240V**

|     |      |
|-----|------|
| AFR | 10.7 |
| BF  | 0.13 |

| Indoor |     | Outdoor temperature: (°CDB) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------|-----|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| EWB    | EDB | 20                          |      |      | 25   |      |      | 30   |      |      | 32   |      |      | 35   |      |      | 40   |      |      |
| °C     | °C  | TC                          | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   | TC   | SHC  | PI   |
| 14.0   | 20  | 4.53                        | 3.19 | 1.13 | 4.53 | 3.19 | 1.27 | 4.53 | 3.19 | 1.41 | 4.53 | 3.19 | 1.46 | 4.42 | 3.13 | 1.53 | 4.19 | 3.01 | 1.65 |
| 16.0   | 22  | 5.35                        | 3.45 | 1.20 | 5.12 | 3.33 | 1.31 | 4.89 | 3.21 | 1.43 | 4.79 | 3.16 | 1.47 | 4.65 | 3.09 | 1.54 | 4.42 | 2.98 | 1.65 |
| 18.0   | 25  | 5.58                        | 3.56 | 1.20 | 5.35 | 3.45 | 1.32 | 5.12 | 3.34 | 1.43 | 5.02 | 3.29 | 1.48 | 4.88 | 3.23 | 1.55 | 4.65 | 3.12 | 1.66 |
| 19.0   | 27  | 5.70                        | 3.71 | 1.21 | 5.47 | 3.60 | 1.32 | 5.23 | 3.49 | 1.44 | 5.14 | 3.45 | 1.48 | 5.00 | 3.39 | 1.55 | 4.77 | 3.28 | 1.66 |
| 22.0   | 30  | 6.04                        | 3.56 | 1.22 | 5.81 | 3.46 | 1.33 | 5.58 | 3.37 | 1.45 | 5.49 | 3.33 | 1.49 | 5.35 | 3.27 | 1.56 | 5.11 | 3.18 | 1.67 |
| 24.0   | 32  | 6.27                        | 3.45 | 1.22 | 6.04 | 3.36 | 1.34 | 5.81 | 3.27 | 1.45 | 5.72 | 3.24 | 1.50 | 5.58 | 3.19 | 1.57 | 5.34 | 3.10 | 1.68 |

**Heating**      **50 Hz 220V-240V**

|     |      |
|-----|------|
| AFR | 11.8 |
|-----|------|

| Indoor |    | Outdoor temperature: (°CWB) |      |      |      |      |      |      |      |      |      |
|--------|----|-----------------------------|------|------|------|------|------|------|------|------|------|
| EDB    |    | -10                         |      | -5   |      | 0    |      | 0    |      | 10   |      |
| °C     | °C | TC                          | PI   | TC   | PI   | TC   | PI   | TC   | PI   | TC   | PI   |
| 15.0   |    | 3.90                        | 1.35 | 4.56 | 1.42 | 5.21 | 1.48 | 6.00 | 1.56 | 6.52 | 1.62 |
| 20.0   |    | 3.70                        | 1.39 | 4.36 | 1.46 | 5.01 | 1.52 | 5.80 | 1.60 | 6.32 | 1.65 |
| 22.0   |    | 3.62                        | 1.40 | 4.28 | 1.47 | 4.93 | 1.54 | 5.72 | 1.61 | 6.24 | 1.67 |
| 24.0   |    | 3.54                        | 1.42 | 4.20 | 1.48 | 4.85 | 1.55 | 5.64 | 1.63 | 6.16 | 1.68 |
| 25.0   |    | 3.50                        | 1.43 | 4.16 | 1.49 | 4.81 | 1.56 | 5.60 | 1.64 | 6.03 | 1.68 |
| 27.0   |    | 3.42                        | 1.44 | 4.08 | 1.51 | 4.73 | 1.57 | 5.52 | 1.65 | 5.94 | 1.68 |

**Symbols**



- AFR: Air flow rate (m<sup>3</sup>/min.)
- BF: Bypass factor
- EWB: Entering wet bulb temp. (°C)
- EDB: Entering dry bulb temp. (°C)
- TC: Total capacity (kW)
- SHC: Sensible heat capacity (kW)
- PI: Power input (kW)

**NOTES**

1. Capacities are based on the following conditions.  
 Corresponding refrigerant piping length: 7.5 m  
 Level difference: 0 m
2.  shows nominal (rated) capacities and power input.

# 5 Dimensional drawings


## 5 - 1 Dimensional Drawings

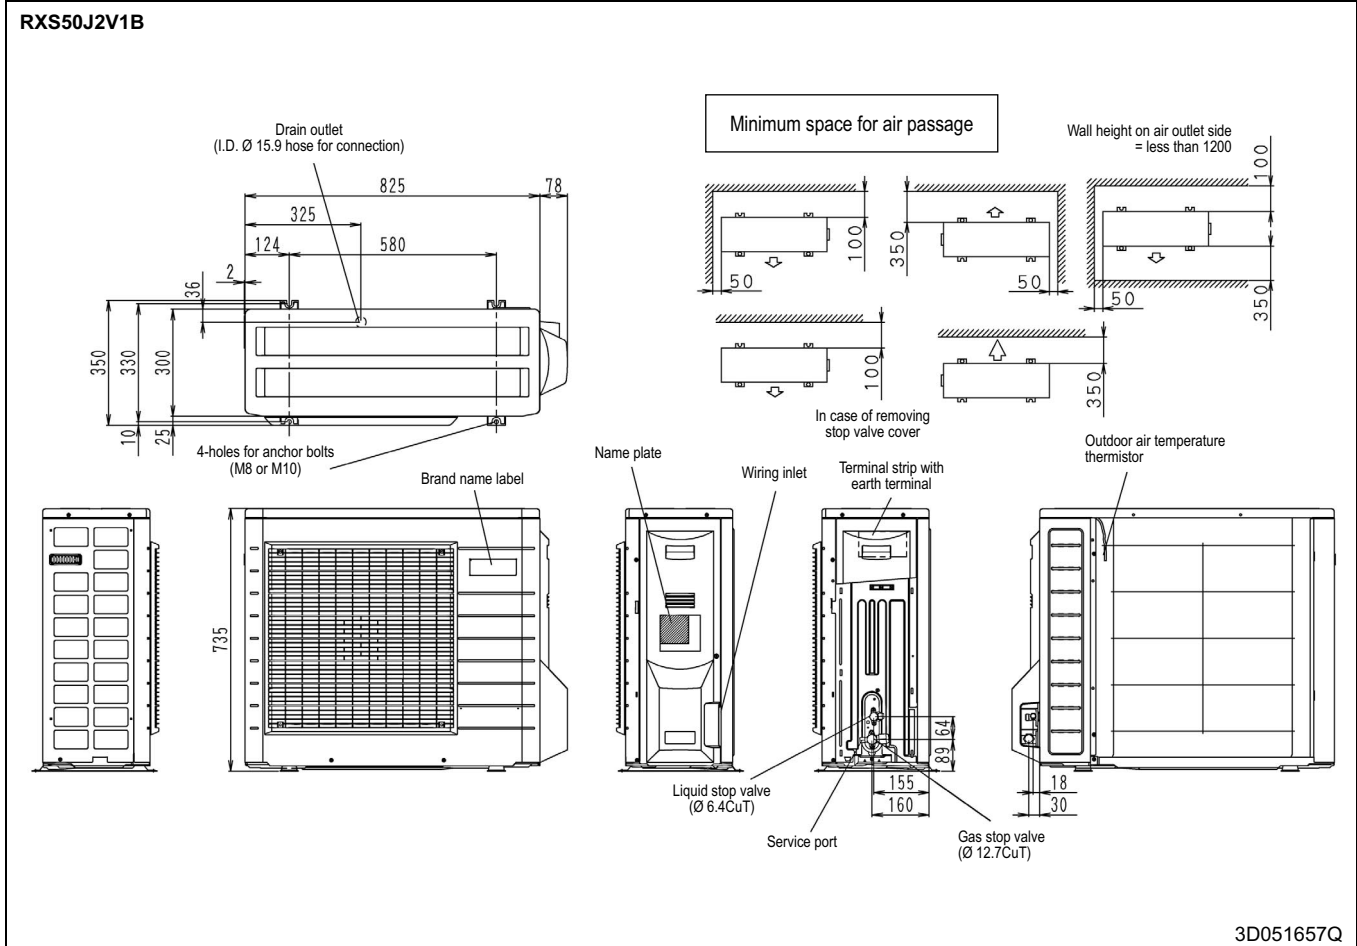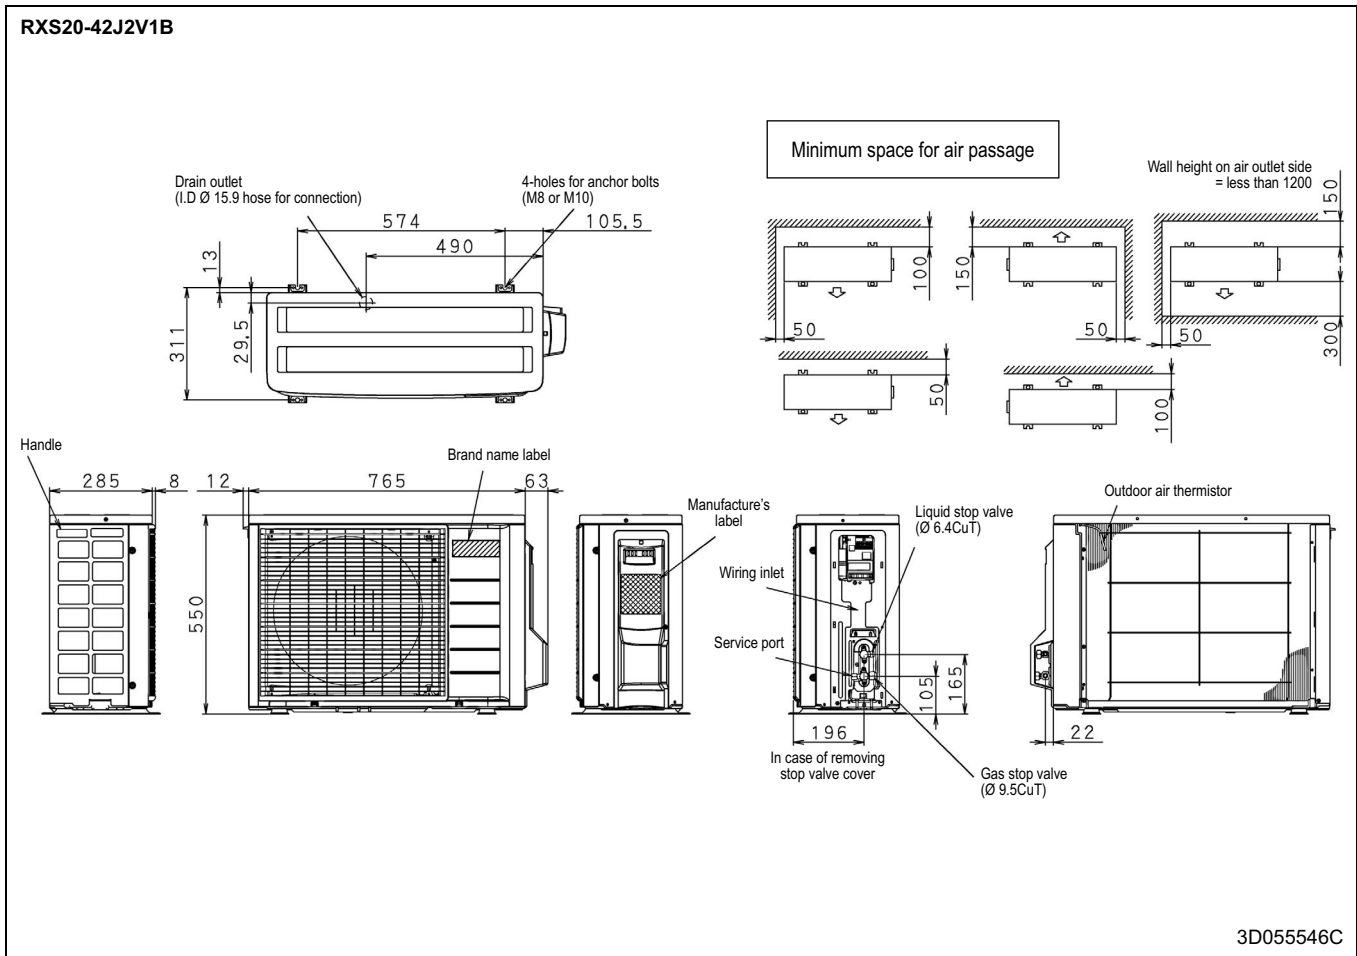

## 6 Centre of gravity


### 6 - 1 Centre of Gravity

RXS20-35J2V1B

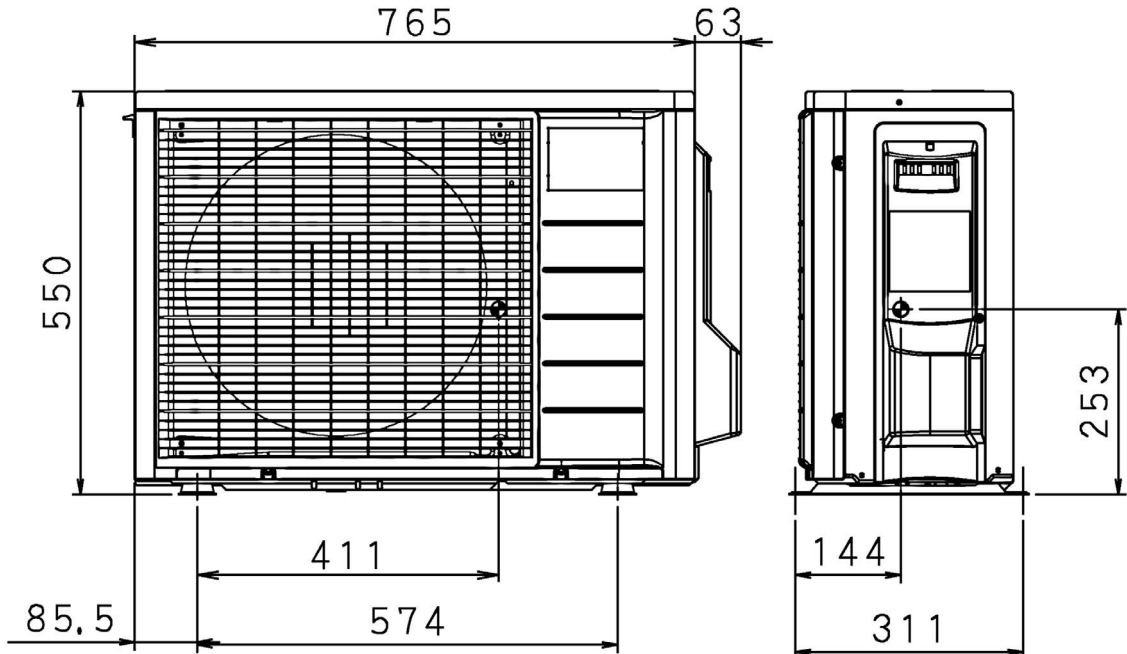

4D056351R


RXS42J2V1B

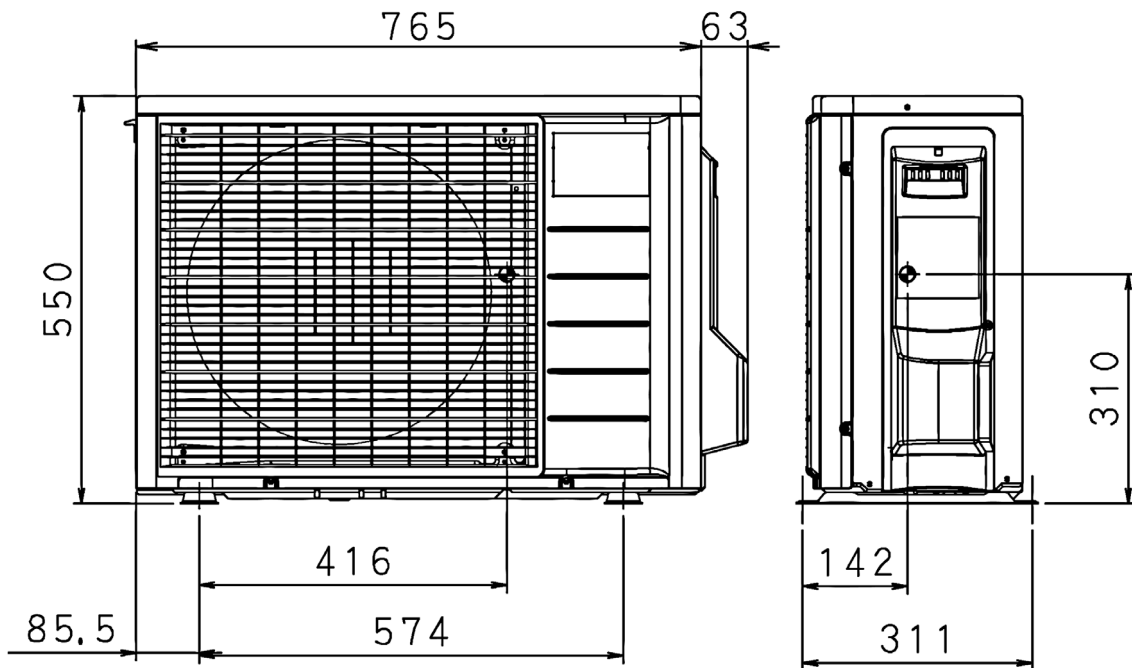

4D059009E



## 6 Centre of gravity

### 6 - 1 Centre of Gravity

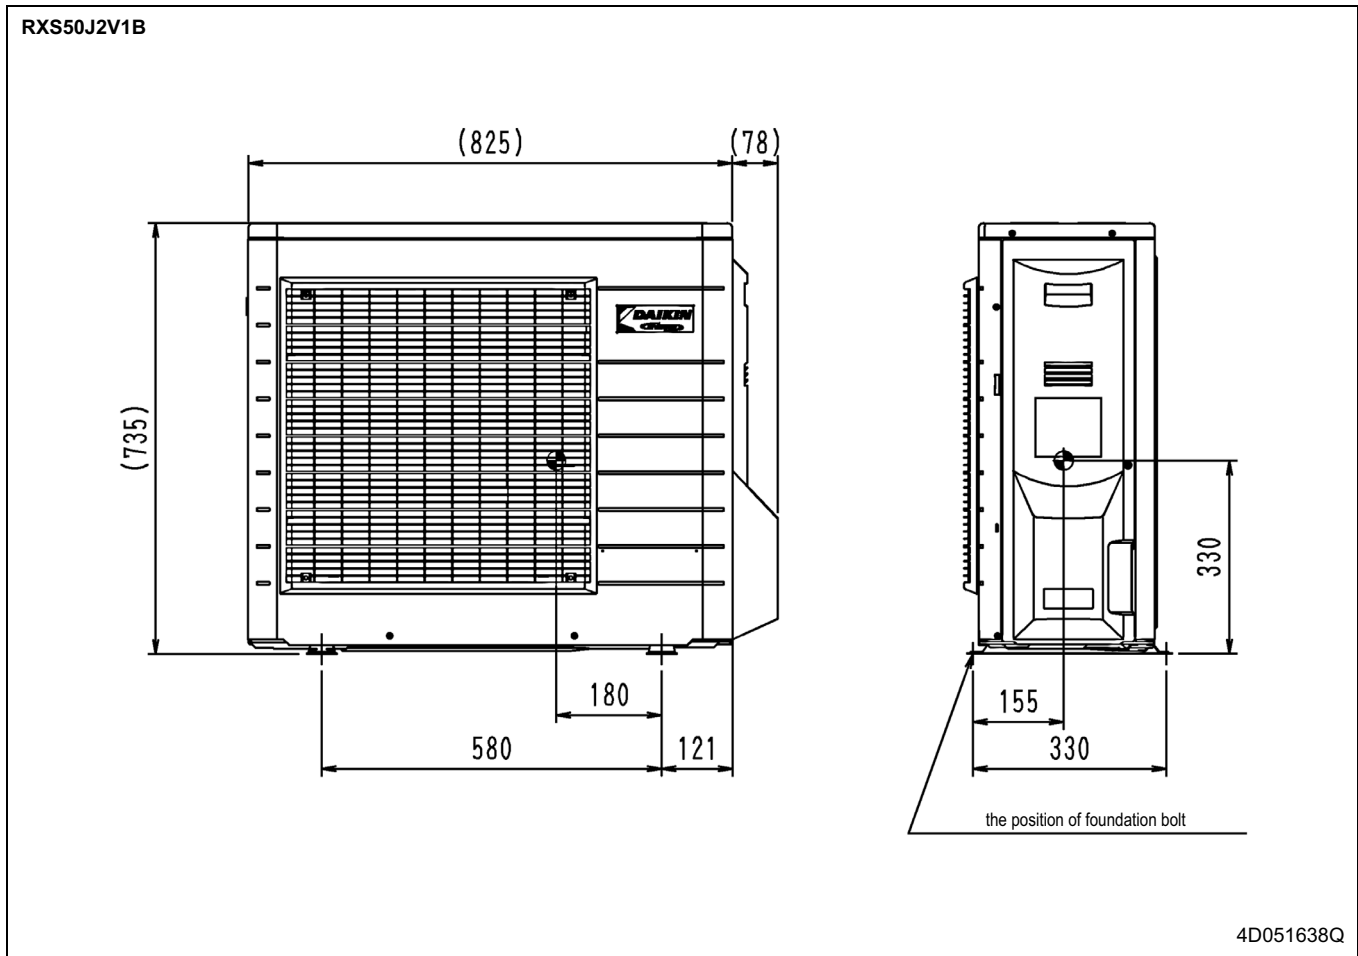

# 7 Piping diagrams



## 7 - 1 Piping Diagrams

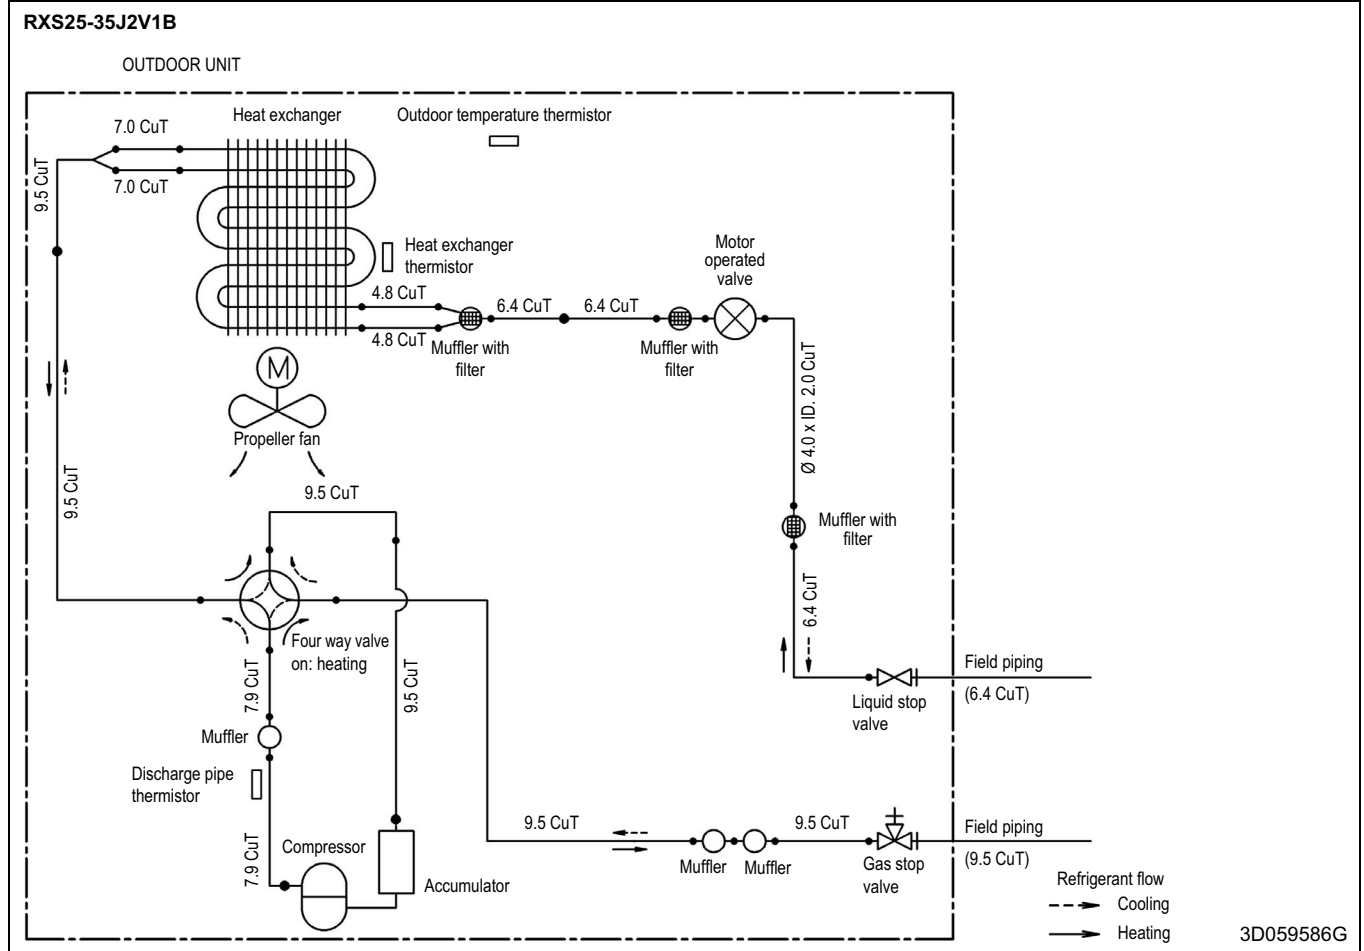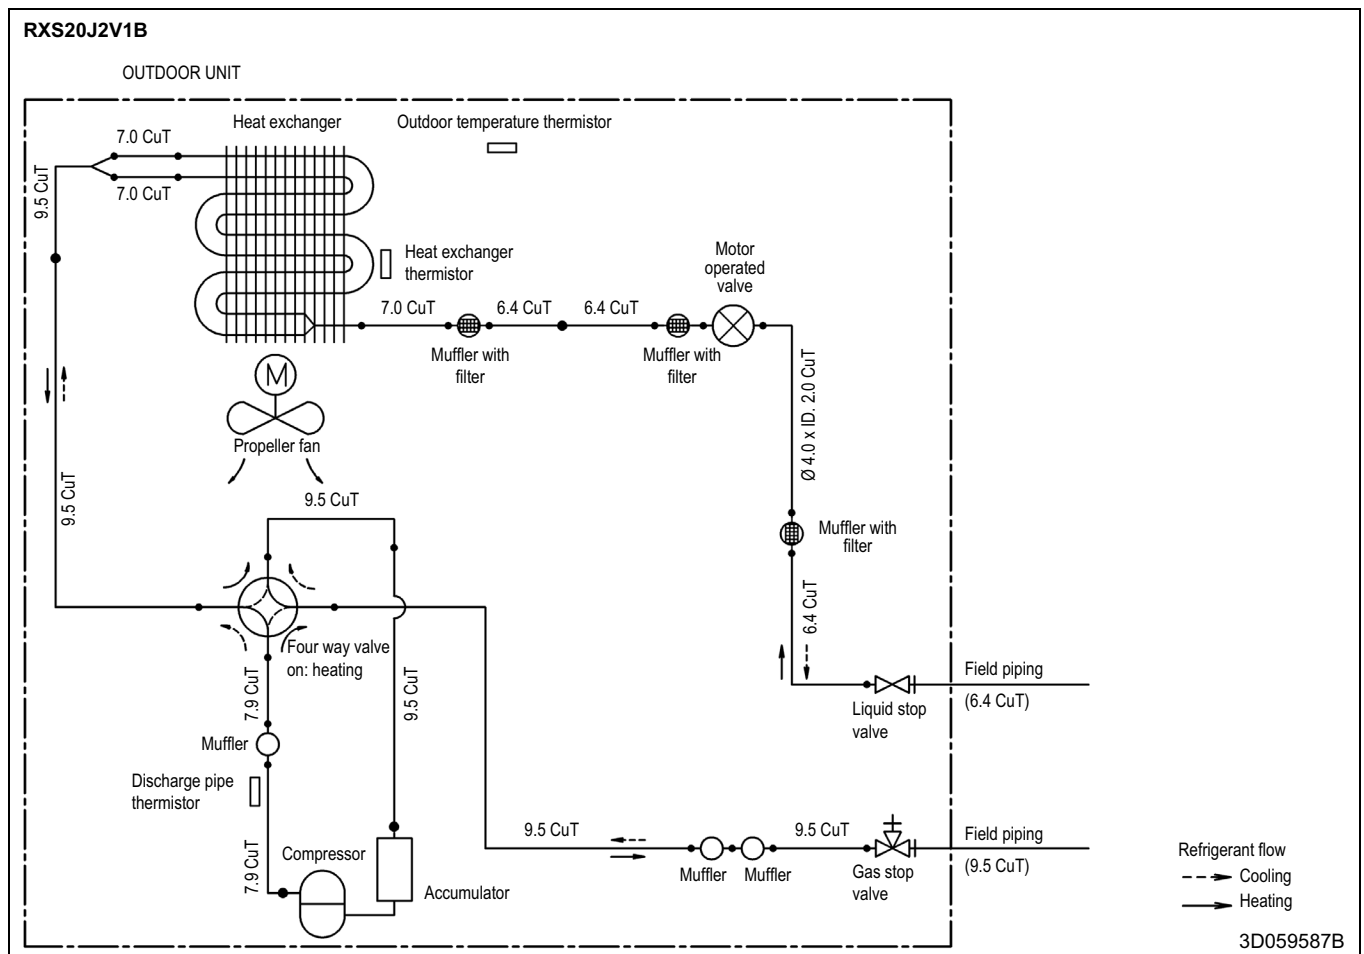





# 7 Piping diagrams

## 7 - 1 Piping Diagrams

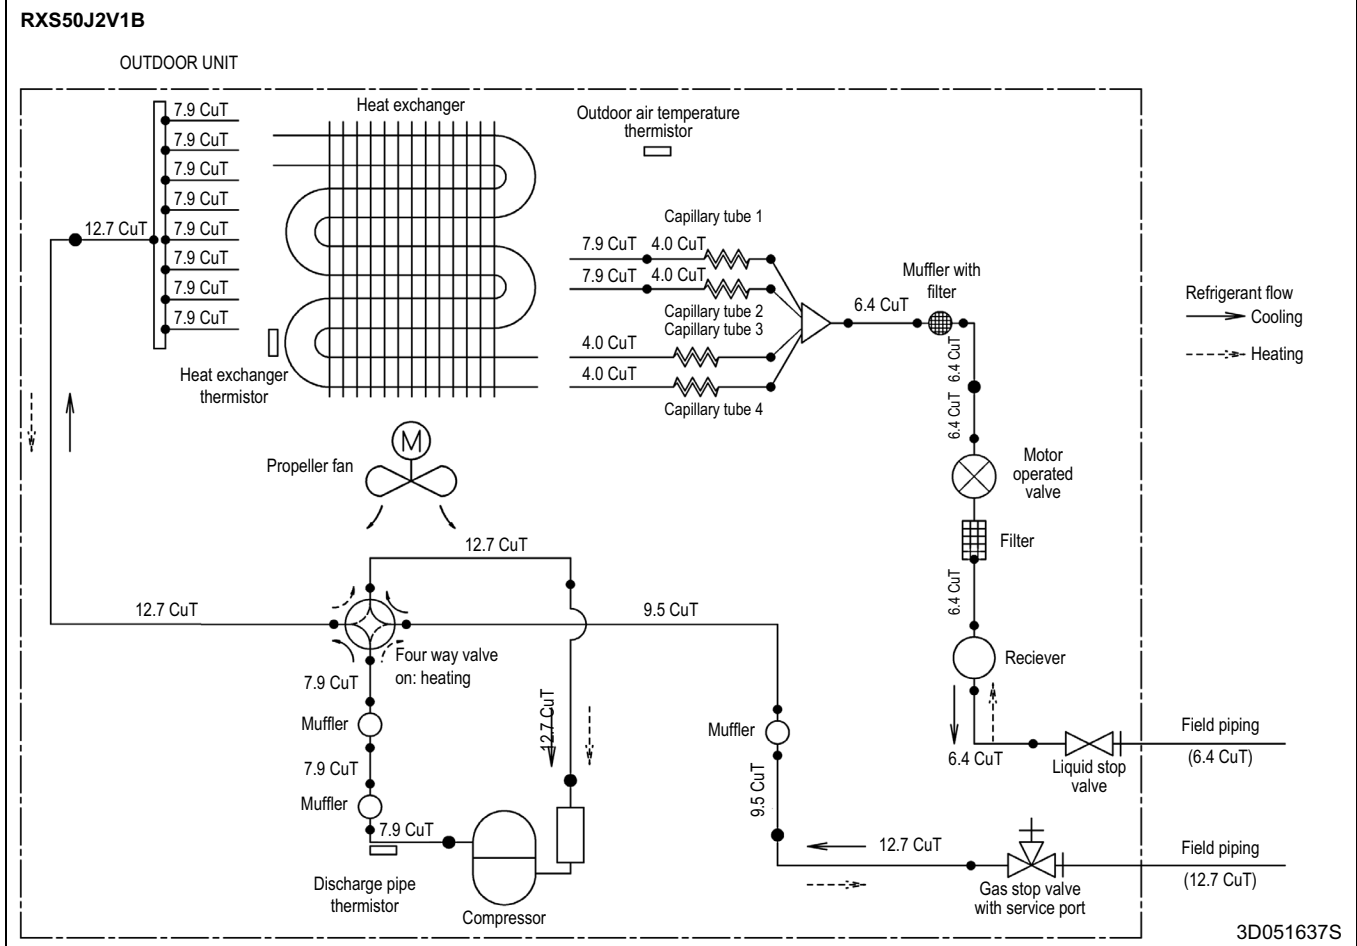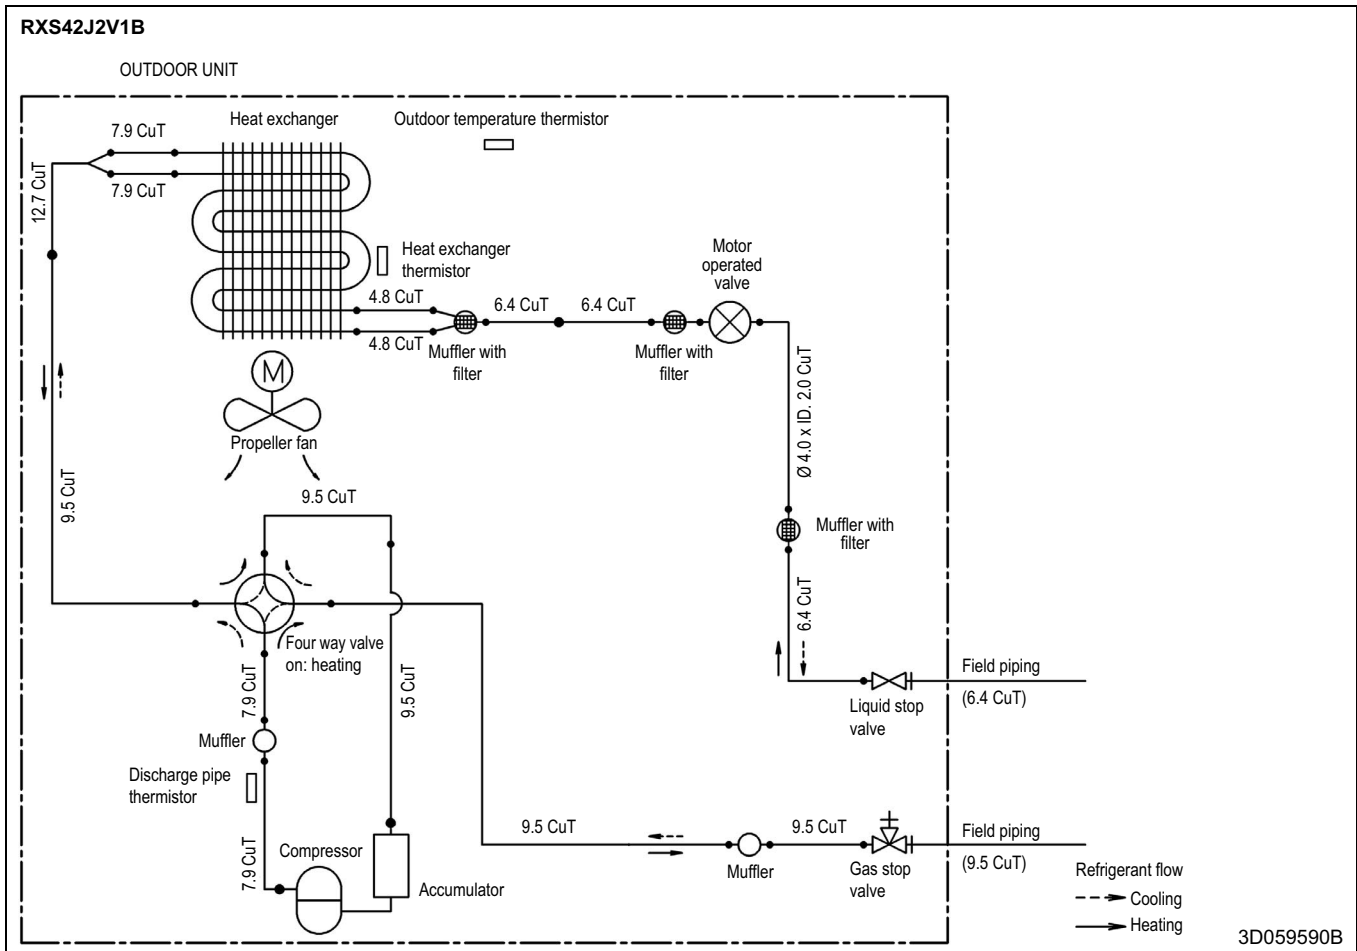


# 8 Wiring diagrams

## 8 - 1 Wiring Diagrams - Single Phase

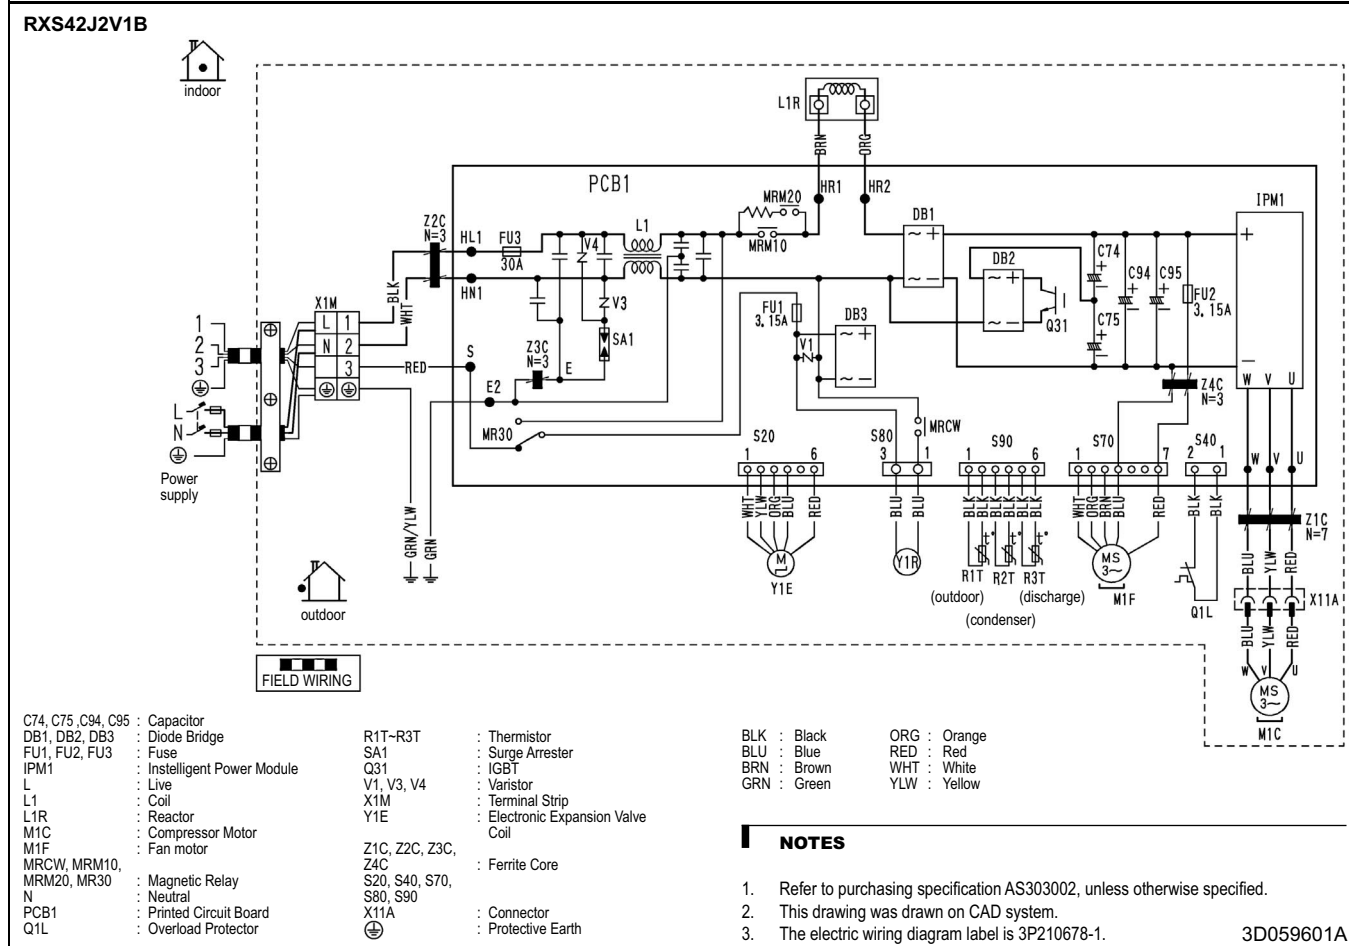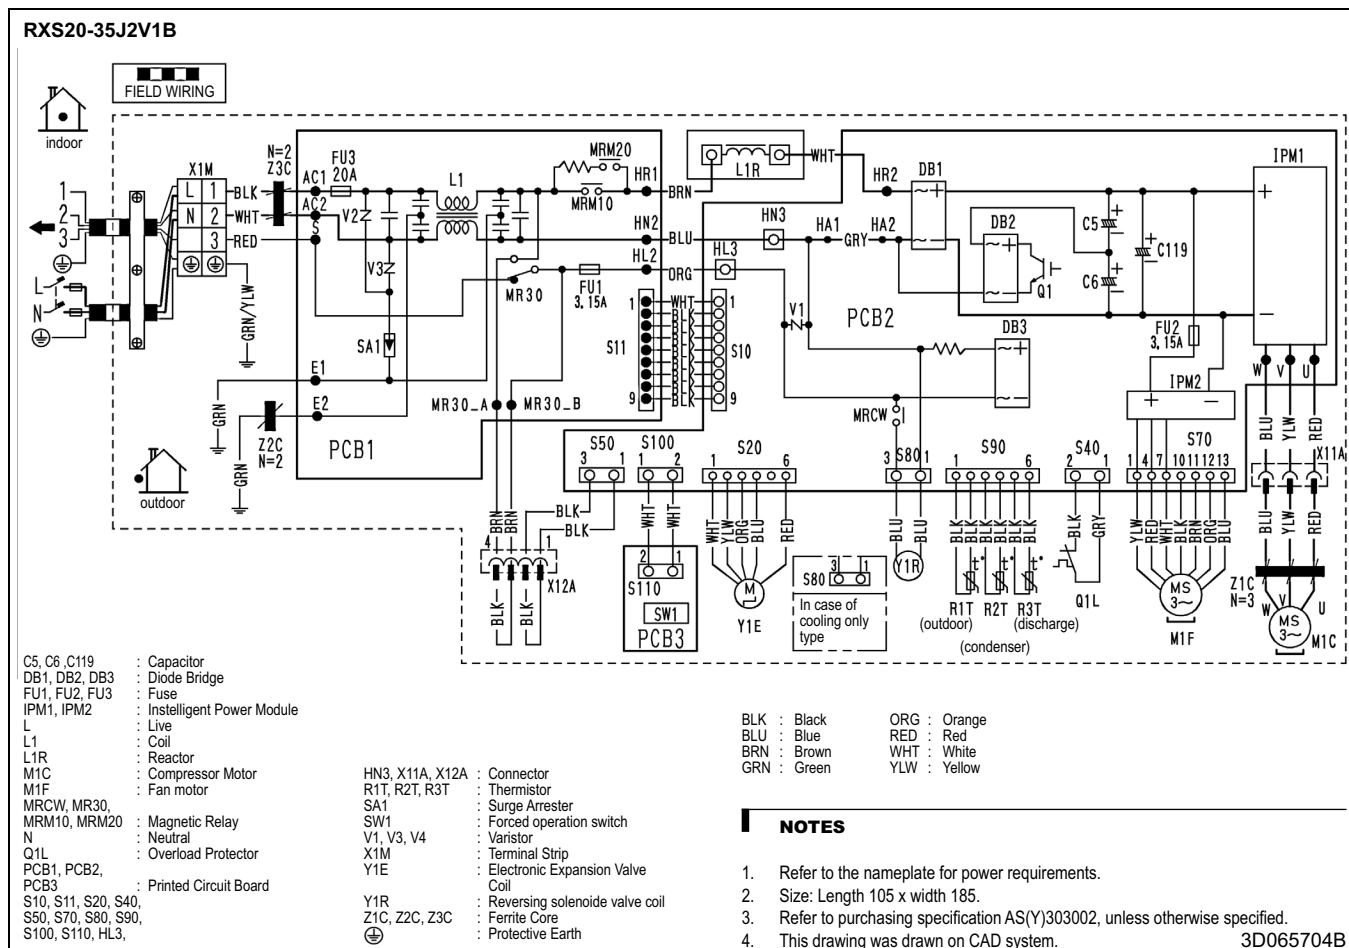

# 8 Wiring diagrams



## 8 - 1 Wiring Diagrams - Single Phase

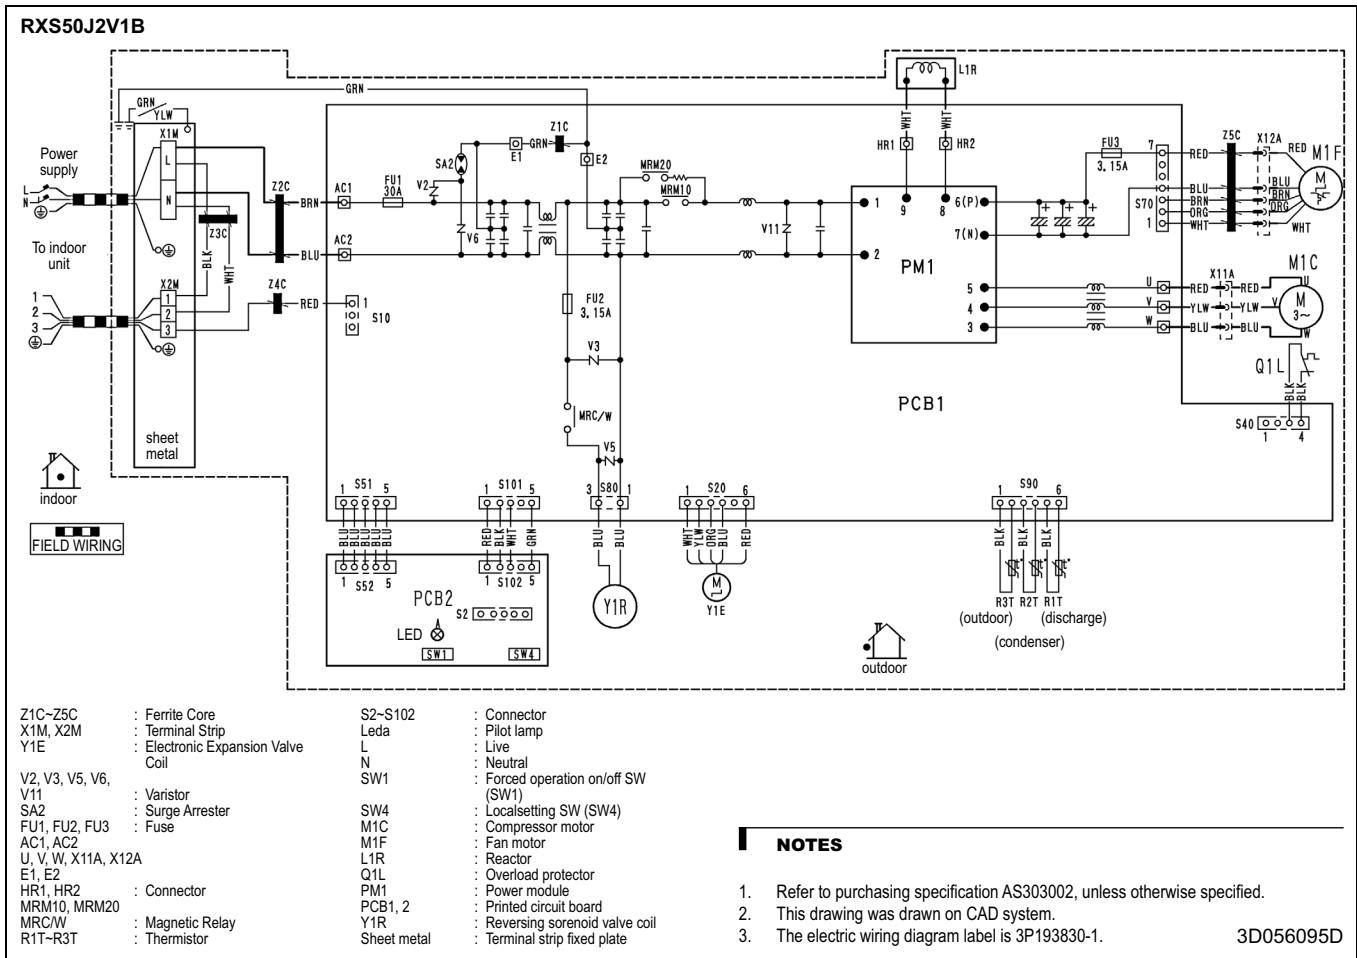

# 9 Sound data

## 9 - 1 Sound Pressure Spectrum


### RXS20-25J2V1B

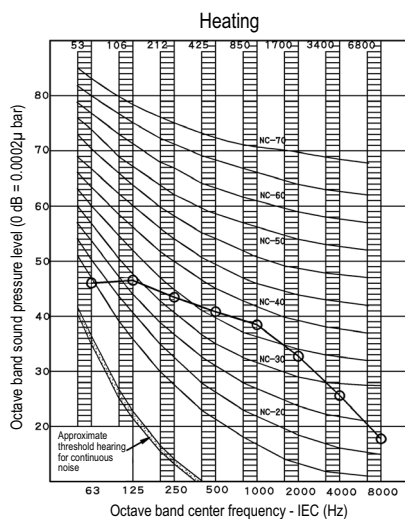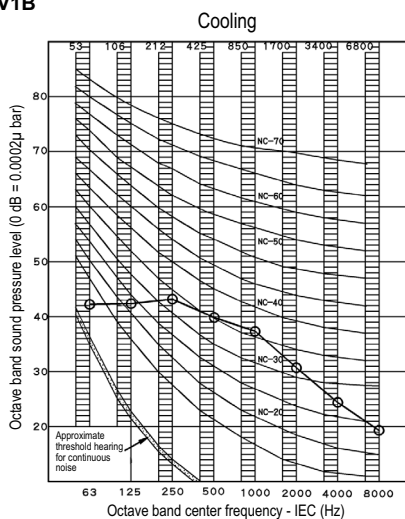

**NOTES**

- Over All (dB): (B,G,N is already rectified)
- Measuring place: measure in anechoic room.
- Operating conditions: Power source 220~240V, 50Hz
- Location of microphone. JISC9612

The operation noise measuring method is in accordance with JISC9612




- Cooling ○—○
- Operation noise differs with operation and ambient conditions.

|       |                  |
|-------|------------------|
| Scale | 50Hz<br>220-240V |
| A     | 46               |

**NOTES**

- Over All (dB): (B,G,N is already rectified)
- Measuring place: measure in anechoic room.
- Operating conditions: Power source 220~240V, 50Hz
- Location of microphone. JISC9612

The operation noise measuring method is in accordance with JISC9612





- Heating ○—○

|       |                  |
|-------|------------------|
| Scale | 50Hz<br>220-240V |
| A     | 47               |

3D059599B


### RXS35J2V1B

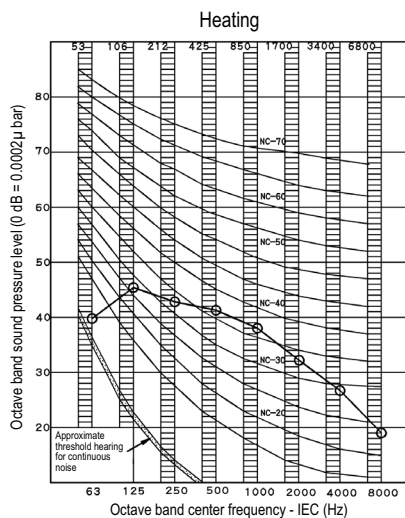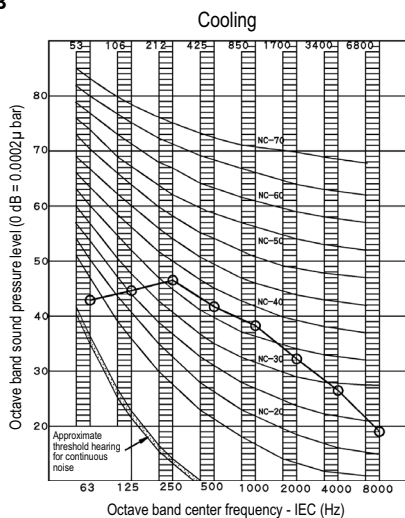

**NOTES**

- Over All (dB): (B,G,N is already rectified)
- Measuring place: measure in anechoic room.
- Operating conditions: Power source 220~240V, 50Hz
- Location of microphone. JISC9612

The operation noise measuring method is in accordance with JISC9612




- Cooling ○—○
- Operation noise differs with operation and ambient conditions.

|       |                  |
|-------|------------------|
| Scale | 50Hz<br>220-240V |
| A     | 48               |

**NOTES**

- Over All (dB): (B,G,N is already rectified)
- Measuring place: measure in anechoic room.
- Operating conditions: Power source 220~240V, 50Hz
- Location of microphone. JISC9612

The operation noise measuring method is in accordance with JISC9612



- Heating ○—○


|       |                  |
|-------|------------------|
| Scale | 50Hz<br>220-240V |
| A     | 48               |

3D059593D

# 9 Sound data


## 9 - 1 Sound Pressure Spectrum

### RXS42J2V1B

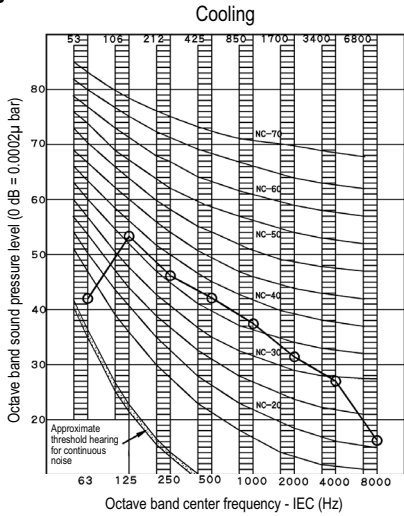

**NOTES**


- 1 Over All (dB): (B,G,N is already rectified)
- 2 Measuring place: measure in anechoic room.
- 3 Operating conditions: Power source 220~240V, 50Hz
- 4 Location of microphone. JISC9612



- The operation noise measuring method is in accordance with JISC9612
- 5 Cooling ○—○
  - 6 Operation noise differs with operation and ambient conditions.


|       |                      |
|-------|----------------------|
| Scale | 50Hz<br>220-240V (H) |
| A     | 48                   |

### Heating

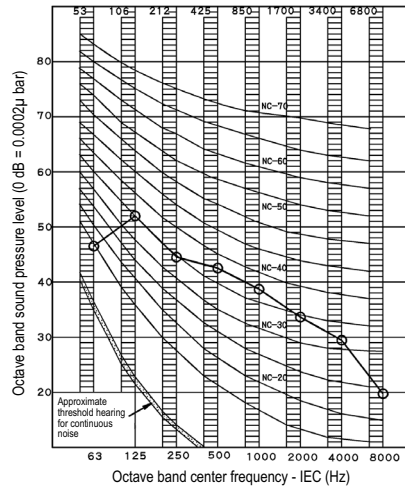

**NOTES**

- 1 Over All (dB): (B,G,N is already rectified)
- 2 Measuring place: measure in anechoic room.
- 3 Operating conditions: Power source 220~240V, 50Hz
- 4 Location of microphone. JISC9612




- The operation noise measuring method is in accordance with JISC9612
- 5 Heating ○—○

|       |                      |
|-------|----------------------|
| Scale | 50Hz<br>220-240V (H) |
| A     | 48                   |

3D059597B

### RXS50J2V1B

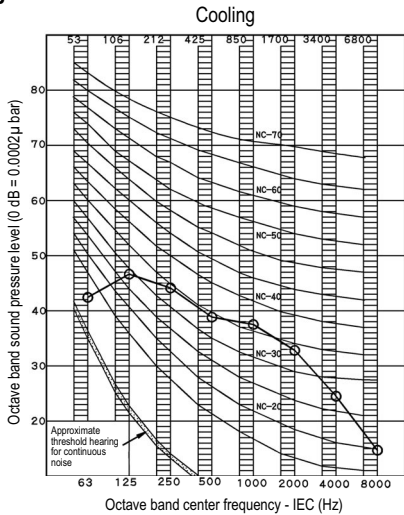

**NOTES**


- 1 Over All (dB): (B,G,N is already rectified)
- 2 Measuring place: measure in anechoic room.
- 3 Operating conditions: Power source 220~240V, 50Hz
- 4 Location of microphone. JISC9612



- The operation noise measuring method is in accordance with JISC9612
- 5 Cooling ○—○ 50 Hz 220-240V
  - 6 Operation noise differs with operation and ambient conditions.

|       |                  |
|-------|------------------|
| Scale | 50Hz<br>220-240V |
| A     | 48               |

### Heating

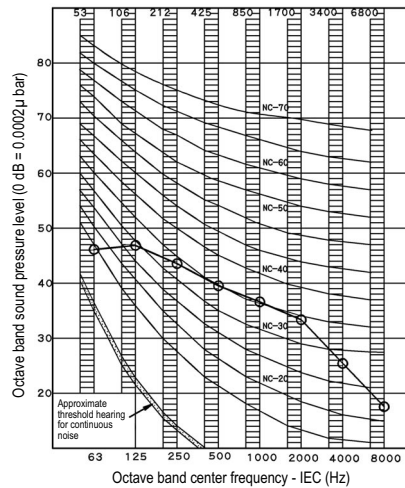

**NOTES**


- 1 Over All (dB): (B,G,N is already rectified)
- 2 Operating conditions: Power source 220~240V, 50Hz
- 3 Heating ○—○ 50 Hz 220-240V

|       |                  |
|-------|------------------|
| Scale | 50Hz<br>220-240V |
| A     | 48               |

3D059740B

# 10 Operation range

## 10 - 1 Operation Range

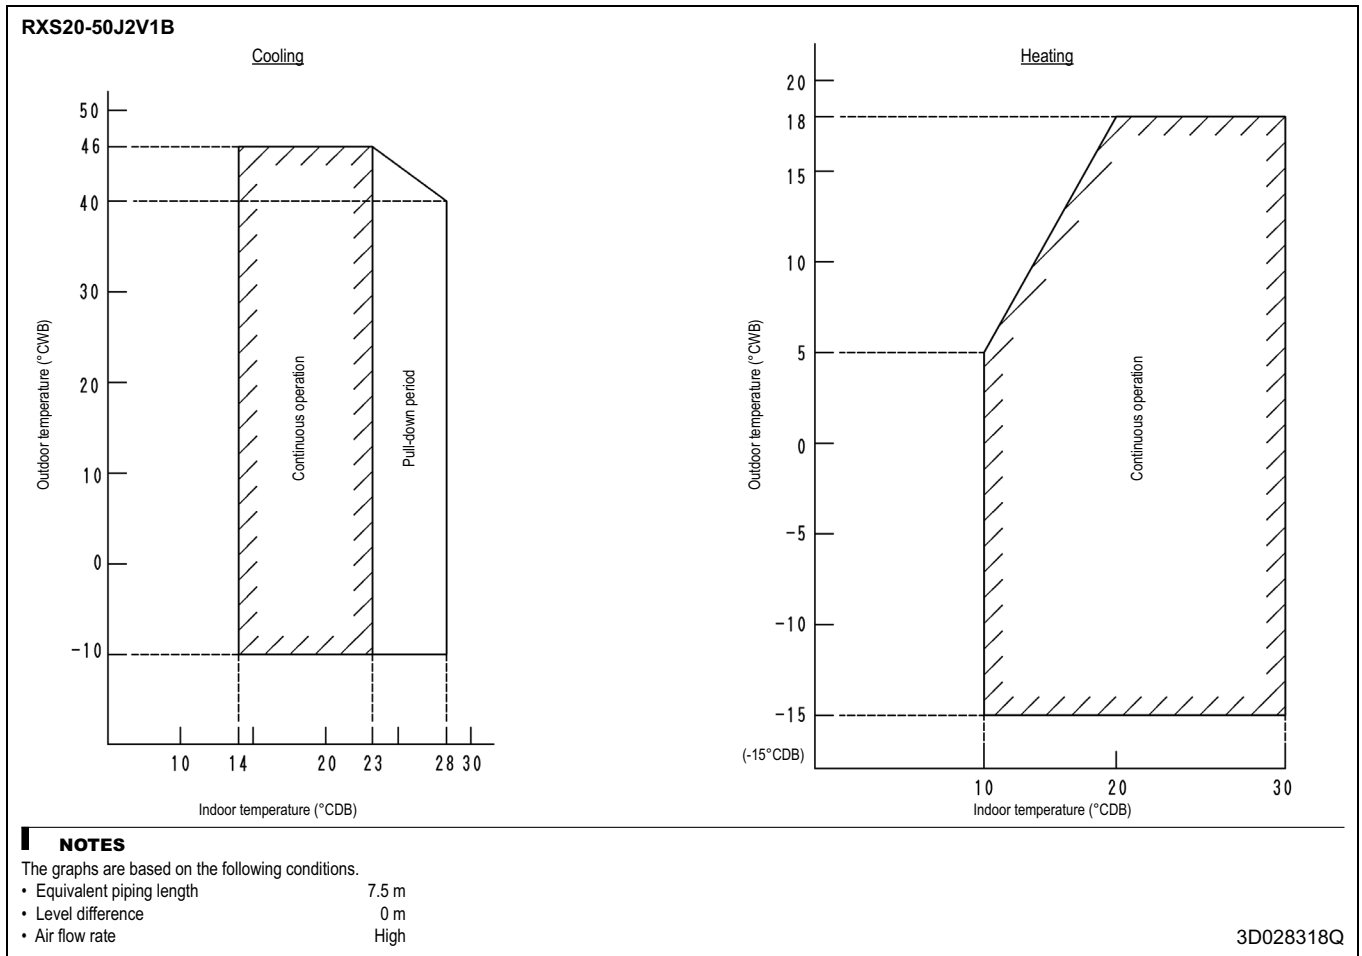

In all of us,  
a green heart



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Daikin products are distributed by:



Daikin Europe N.V. is participating in the EUROVENT Certification Programme. Products are as listed in the EUROVENT Directory of Certified Products. Multi units are Eurovent certified for combinations up to 2 indoor units